
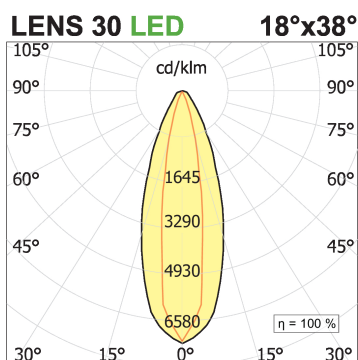
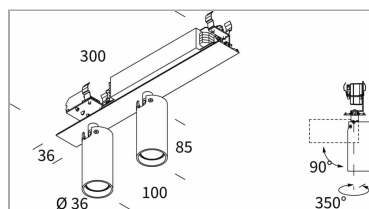


## Focus 42S for File system

code FR041.940ZD/01

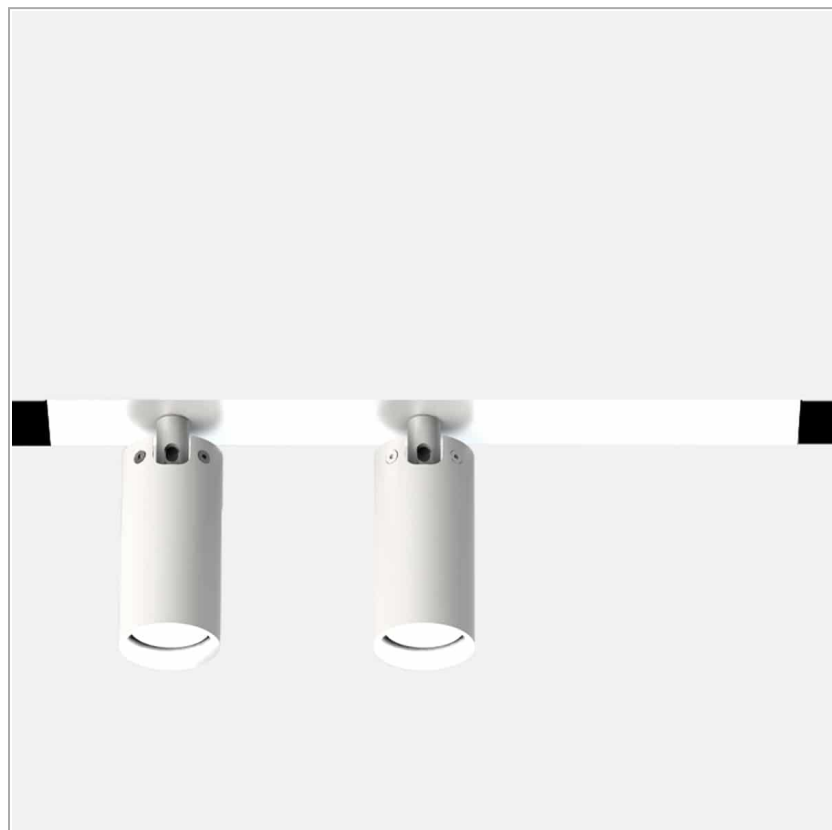

### PRODUCT DESCRIPTION

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 66x40 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, ceiling-mounted, suspended, recessed with a super-slim edge trim, just 5 mm wide (61.5 x 40 mm) and trimless recessed. To be integrated with LED linear light sources, battens for T16 fluorescent lamps, projectors with built-in LED source and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or dark-light aluminium grille with high specular qualities and mounting brackets or suspension cables. IP40 protection rating.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | system                  |
| Light source                 | LED                     |
| Absorbed power               | 2x8 W                   |
| Color temperature            | 4000K                   |
| Color rendering index CRI    | >90                     |
| Optic                        | Asymmetric              |
| Finishing                    | White                   |
| Luminous flux of the product | 2128 lm                 |
| Luminous efficiency          | 133 lm/W                |
| MacAdam color tolerance      | 2                       |
| Life time estimate           | 25000h L90 B10<br>ta25° |
| Protocol                     | Dimmable Dali           |
| Energy efficiency class      | D                       |
| Weight                       | 0.70 Kg                 |
| Dimension                    | L300xW38xH85 Ø36 mm     |
| IP Grade                     | IP20                    |
| Power supply                 | 220-240V 50-60Hz        |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

