


### File 2 Ceiling 24W/m

code F2204.8TWP/01

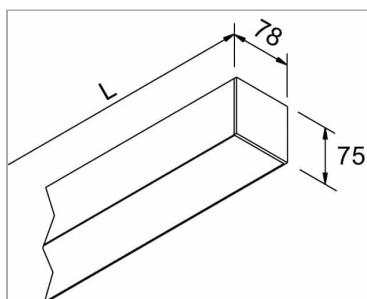

## PRODUCT DESCRIPTION

Ceiling luminaire IP40/IP43, direct and diffused light. Body in extruded aluminum 6060, head in die-cast aluminum light proof, led SMD professional 24W/mt color temperature Tunable WhiteK, assembled on rigid pcb with spray coating treatment for moisture protection, mounted and wired on ARS1 anodized aluminum extruded heatsink with additional transparent palsun protection to prevent contact to the LEDs during installation or maintenance, quick installation tools free by means of Click system with double-click harmonic steel springs for a first clamping to the profile that allows the wiring to the electrical network, to quick coupling without using screws. Integrated electronic power supply.

## PRODUCT SPECS

|                           |                                         |
|---------------------------|-----------------------------------------|
| Installation method       | Ceiling surface mounted                 |
| Light source              | LED                                     |
| Absorbed power            | 38,4 W                                  |
| Color temperature         | Tunable White                           |
| Color rendering index CRI | >90                                     |
| Optic                     | Opal polycarbonate diffuser             |
| Finishing                 | White                                   |
| MacAdam color tolerance   | 3                                       |
| Life time estimate        | 50000h Ta 25° L80B10                    |
| Protocol                  | On/Off                                  |
| Energy efficiency class   | D                                       |
| Dimension                 | L1700 mm                                |
| IP Grade                  | Inst. Parete Ip40 / Inst. Soffitto Ip43 |
| Power supply              | 220-240V 50-60Hz                        |

**WEB PAGE**



## ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

