File 2 Ceiling LED A/F

code F2238.940X/01

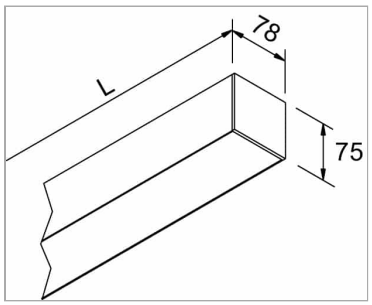

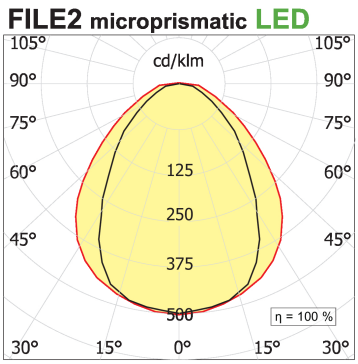

PRODUCT DESCRIPTION

Ceiling luminaire IP40/IP43, direct and diffused light. Body in extruded aluminum 6060, head in die-cast aluminum light proof, led SMD professional 32W/mt color temperature 4000K, assembled on rigid pcb with spray coating treatment for moisture protection, mounted and wired on ARS1 anodized aluminum extruded heatsink with additional transparent palsun protection to prevent contact to the LEDs during installation or maintenance, quick installation tools free by means of Click system with double-click harmonic steel springs for a first clamping to the profile that allows the wiring to the electrical network, to quick coupling without using screws. Integrated electronic power supply.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	linear LED 32W/mt CRI90
Absorbed power	90 W
Color temperature	4000K
Color rendering index CRI	90
Optic	Microprismatic diffuser
Finishing	White
Luminous flux of the product	7408 lm
Luminous efficiency	82 lm/W
Protocol	On/Off
Energy efficiency class	D
Dimension	L2825 mm
IP Grade	Inst. Parete Ip40 / Inst. Soffitto Ip43
Power supply	220-240V 50-60Hz

WEB PAGE

ASSEMBLY INSTRUCTIONS

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy - +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it

LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy - +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it