

File 2 trimless recessed 32W/m

code F2131.930PD/01



















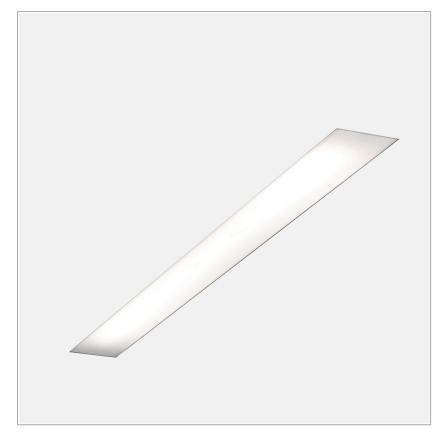



PRODUCT DESCRIPTION

Lamp with direct light from built-in shaved; color rendering CRI >90. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector; equipped with springs in harmonic steel for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol Dimmable Dali. Lamp with colour finish white; . Degree of protection IP40/IP43.

PRODUCT SPECS

Trimless recessed
linear LED 32W/mt CRI90
27 W
3000K
90
Opal polycarbonate diffuser
White
1930 lm
71 lm/W
Dimmable Dali
D
W860 mm
82XL+2 mm
Inst. Parete Ip40 / Inst. Soffitto Ip43
220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS

