

Minifile Ceiling LED 3000K

code ML208.840D/01




PRODUCT DESCRIPTION


ceiling lamp LED with opaline diffuser

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	64 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	3714 lm
Luminous efficiency	58 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L2825 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

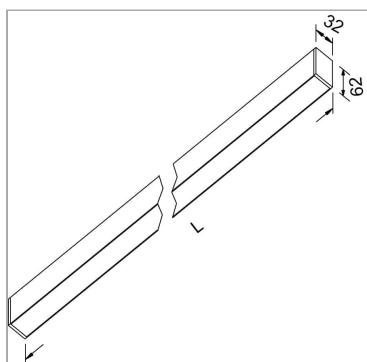

MINIFILE opal LED

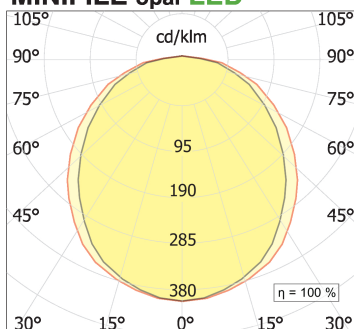

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Wallbox Couple of closure heads for wallbox MINIFILE



code LTM200.1

Ccouple of closure heads for wallbox minifile

Technical Sheet

