
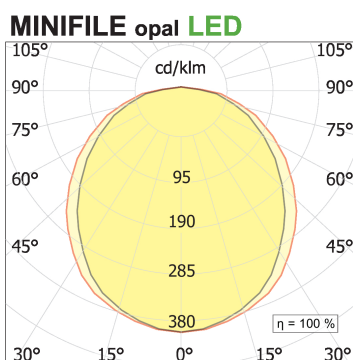


## Minifile suspension

code ML307.827D/01

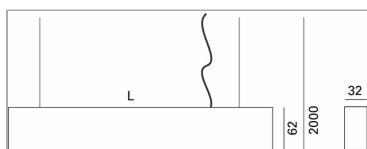

### PRODUCT DESCRIPTION

Direct light indoor suspension lamp made of extruded aluminium 6060, complete with LED; colour rendering index CRI >90. Professional led modules 57.6 W assembled and wired on extruded aluminium heatsink with high performance reflector, equipped with harmonic steel springs for installation in Tools free profile; 5-cable feed-through wiring with quick-connect terminal blocks; protocol Dimmable Dali. Steel suspension cables complete with chrome-plated brass micrometric adjusters. Lamp with colour finish white; white opal polycarbonate diffuser with diffusing film. IP40 degree of protection.

### PRODUCT SPECS

|                              |                      |
|------------------------------|----------------------|
| Installation method          | Suspension           |
| Light source                 | LED                  |
| Absorbed power               | 57,6 W               |
| Color temperature            | 2700K                |
| Color rendering index CRI    | >90                  |
| Finishing                    | White                |
| Luminous flux of the product | 3245 lm              |
| Luminous efficiency          | 56 lm/W              |
| MacAdam color tolerance      | 3                    |
| Life time estimate           | 50000h Ta 25° L80B10 |
| Protocol                     | Dimmable Dali        |
| Energy efficiency class      | E                    |
| Dimension                    | L2545 mm             |
| IP Grade                     | IP40                 |
| Power supply                 | 220-240V 50-60Hz     |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



