


## Leva 5 trimless recessed - kit

code LV005K.927F/01

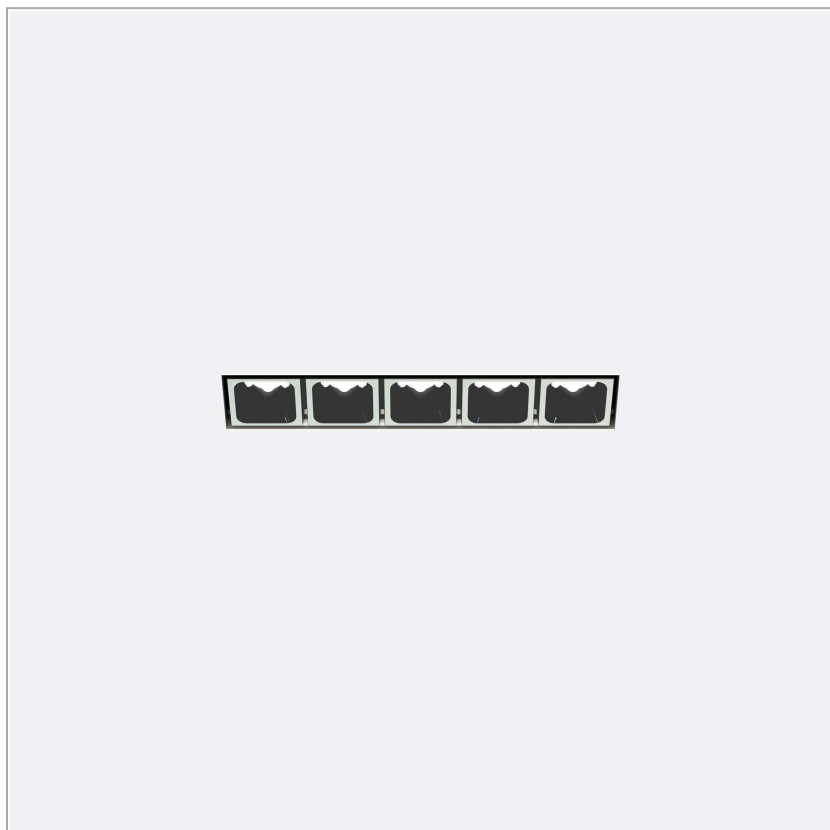

### PRODUCT DESCRIPTION

Luminaire for integrated LED Chip On Board sources. Flush-mounted installation. Luminaire body in extruded painted aluminium white. Optical units complete with LED chip on board, lens, anti-glare housing. Optics 32° UGR<16. Degree of protection IP20.

### PRODUCT SPECS

|                              |                      |
|------------------------------|----------------------|
| Installation method          | Trimless recessed    |
| Light source                 | LED                  |
| Absorbed power               | 5x2,2 W              |
| Color temperature            | 2700K                |
| Color rendering index CRI    | >90                  |
| Optic                        | Flood 32°            |
| Finishing                    | White                |
| Luminous flux of the product | 922 lm               |
| Luminous efficiency          | 84 lm/W              |
| MacAdam color tolerance      | 2                    |
| Life time estimate           | 50000h Ta 25° L90B10 |
| Energy efficiency class      | E                    |
| Weight                       | 0.10 Kg              |
| Dimension                    | L150xW27xH60 mm      |
| Hole size                    | 32X156 mm            |
| IP Grade                     | IP20                 |
| Protection Class             | Class III appliance  |
| Product Spec                 | Rectangular shape    |
| Power supply/Transformer     | Not included         |
| Protocol                     | See power supply     |



### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### Accessories Leva Trimless box 5



code LV005A

Trimless recessed indoor wallbox for false ceiling

Technical Sheet



### AE700.11C (Copia)



code AE700.12C

Electronic power supply current

Technical Sheet



## OPTIONAL ACCESSORIES

### Wallbox for brick wall and concrete – Leva5



code CCLV05

Formwork for masonry and concrete, suitable for Leva5. Internal length 157mm - external length 159,4mm

Technical Sheet



