
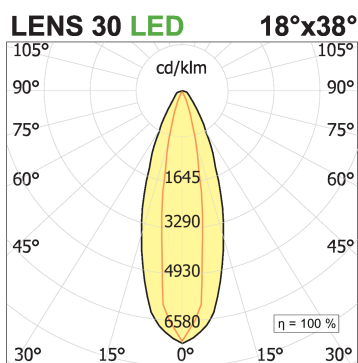


## Focus 32S, for Minifile system

code FR061.940ZD/01

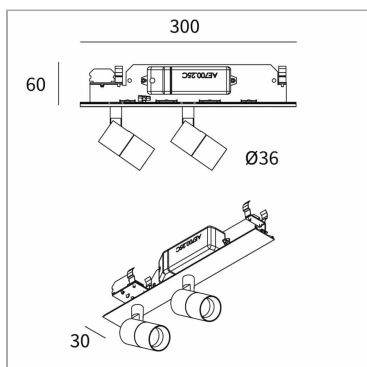

### PRODUCT DESCRIPTION

Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | system                      |
| Light source                 | LED                         |
| Absorbed power               | 2x8 W                       |
| Color temperature            | 4000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Asymmetric 18°x38°          |
| Finishing                    | White                       |
| Luminous flux of the product | 2128 lm                     |
| Luminous efficiency          | 133 lm/W                    |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Protocol                     | Dimmable Dali               |
| Energy efficiency class      | D                           |
| Dimension                    | L300xH60 Ø36 mm             |
| IP Grade                     | IP20                        |
| Power supply                 | 220-240V 50-60Hz            |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

