
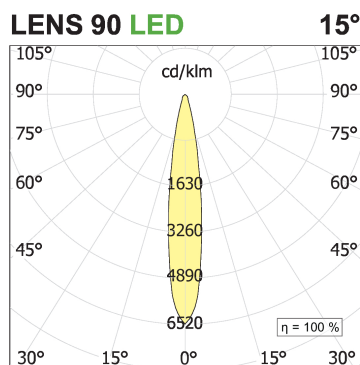
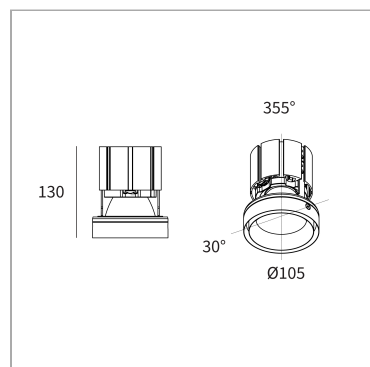
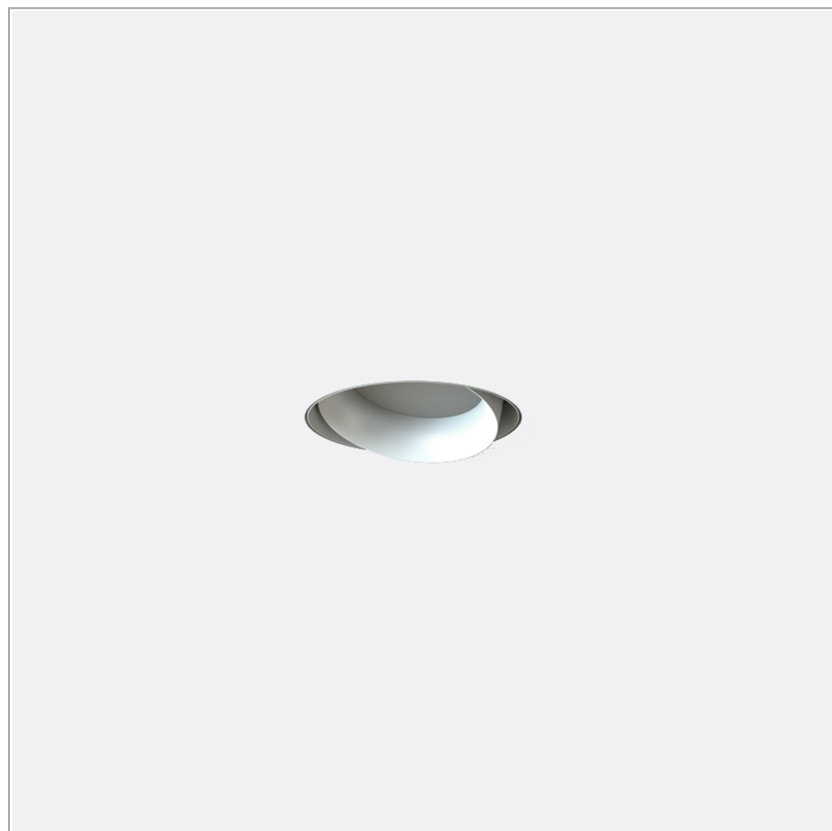


## Nyx Trimless Directional T80D - optic group

code LTN25K.930S/01

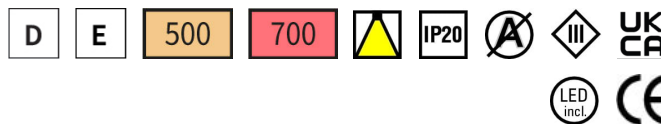

### PRODUCT DESCRIPTION

Round or square, fix or directional, trimless recessed downlight for ceiling installation, for accent or diffused lighting. Light source in recessed position for anti-glare lighting. Available both in plasterboard false-ceiling and in concrete/brick wall installation version. For integrated LED source or for 12V/230V QR-CB 35, QR-CB 51 and QR-LP 111 or 230V QPAR16 GU10 halogen/led lamps. Body and optical group in painted aluminum. Version with Integrated Chip On Board LED source provided with 99,99% pure aluminum coated reflector. Directional versions: optical group adjustable 355° horizontally and +/- 20° vertically. Remote power-supply available as an accessory. Degree of protection IP20/IP23/IP54.

### PRODUCT SPECS

|                              |                              |
|------------------------------|------------------------------|
| Installation method          | Trimless recessed            |
| Light source                 | LED                          |
| Absorbed power               | 17 W / 24,3 W                |
| Color temperature            | 3000K                        |
| Color rendering index CRI    | >90                          |
| Optic                        | Spot 15°                     |
| Finishing                    | White                        |
| Luminous flux of the product | 1789 lm / 2558 lm            |
| Luminous efficiency          | 105 lm/W                     |
| MacAdam color tolerance      | 3                            |
| Life time estimate           | 3SDCM 50000h L90 B10 ta 25°C |
| Energy efficiency class      | D / E                        |
| Weight                       | 0.9 Kg                       |
| Dimension                    | H127 Ø105 mm                 |
| Hole size                    | 125 mm                       |
| IP Grade                     | IP20                         |
| Protection Class             | Class III appliance          |
| Product Spec                 | Adjustable, Circular shape   |
| Power supply/Transformer     | Not included                 |
| Protocol                     | See power supply             |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 3

## MANDATORY ACCESSORIES

### Outer Casing Nyx T80D trimless for false ceiling




code LTN08A

Trimless recessed uncategorized wallbox for false ceiling

Technical Sheet



### Accessori Wallbox Nyx For Brickwall T80D outer casing box for brick wall



code LTN08B

Trimless recessed indoor outer casing for brick wall square shape

Technical Sheet



### AE500.20C1



code AE500.20C1

Electronic power supply current

### AE700.32C1.MP (Copia)



code AE700.30C.MP


Electronic power supply current

Technical Sheet



## OPTIONAL ACCESSORIES

### Accessori Lens Ø 74 Satin lens Ø 74



code L074S

uncategorized


Technical Sheet



### Accessori Lens Ø 74 Elissoidal lens Ø 74

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 2 / 3




code L074E

uncategorized

Technical Sheet



### Accessori Lens ø 74 Asymmetric lens Ø 74




code L074A

uncategorized

Technical Sheet



### Accessori Lens ø 74 Honey comb louver Ø 74



code L074R

uncategorized

Technical Sheet

