



## Microfile wall/ceiling

code MF013.827/01



### MICROFILE LED

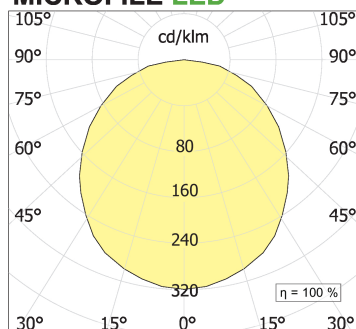

### PRODUCT DESCRIPTION

Direct light ceiling lamp made of extruded aluminum 6060, square section measuring 19,8x19,5 mm; complete with led; CRI color rendering index >90. Professional led modules 33 W assembled and wired, protocol vedi alimentatore. Epoxy powder coated, white color finish; complete with polycarbonate [diffusore] with diffusing film. Degree of protection IP40.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | Ceiling surface mounted |
| Light source                 | Linea Led               |
| Absorbed power               | 33 W                    |
| Color temperature            | 2700K                   |
| Color rendering index CRI    | >90                     |
| Finishing                    | White                   |
| Luminous flux of the product | 1600 lm                 |
| Luminous efficiency          | 48 lm/W                 |
| Protocol                     | On/Off                  |
| Energy efficiency class      | D                       |
| Weight                       | 0.90 Kg                 |
| Dimension                    | L1515 mm                |
| IP Grade                     | IP40                    |
| Protection Class             | Class III appliance     |
| Power supply/Transformer     | Not included            |
| Protocol                     | See power supply        |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

