
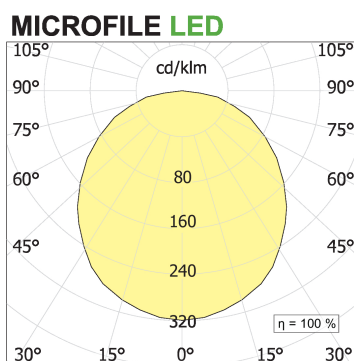


Microfile Trimless Recessed

code MF052.830/01



PRODUCT DESCRIPTION

Direct light recessed flush mounted made of extruded aluminum 6060, square section measuring 19,8x19,5 mm; complete with led; CRI color rendering index >90. Professional led modules 26.4 W assembled and wired; protocol vedi alimentatore. Epoxy powder coated, white color finish; complete with polycarbonate [diffusore] with diffusing film. Degree of protection IP40.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	Linea Led
Absorbed power	26,4 W
Color temperature	3000K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	1324 lm
Luminous efficiency	50 lm/W
Protocol	On/Off
Energy efficiency class	D
Weight	0.42 Kg
Dimension	L1220 mm
Hole size	25xL+2 mm
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Walk-over
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



