

Recessed Minifile profile with Leva modules

code ML022.930ZD/01




PRODUCT DESCRIPTION

Direct light recessed lamp with 5-light Leva modules.

PRODUCT SPECS

Installation method	recessed
Light source	LED
Absorbed power	10x2,2 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Asymmetric 41°x18°
Finishing	White box - black optic
Luminous flux of the product	2170 lm
Luminous efficiency	99 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	Dimmable Dali / Touch & Dimm
Energy efficiency class	E
Weight	1.60 Kg
Dimension	L1140 mm
Hole size	42xL+2 mm
IP Grade	IP20

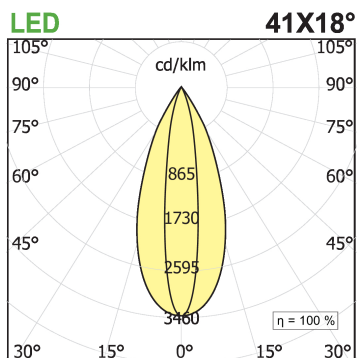

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 1