

Mini Sight Minimal 4M

code MS80.927F/01





PRODUCT DESCRIPTION

Square recessed fixture without frame, 4 lamps. Adjustable pull-out optic

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	4x12 W / 4x18 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	5300 lm / 6059 lm
Luminous efficiency	110 lm/W / 84 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	1.85 Kg
Dimension	L193xW193xH135 Ø55 mm
Hole size	vedi accessori mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

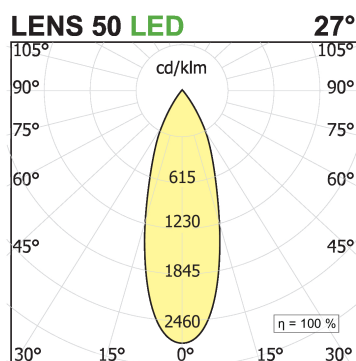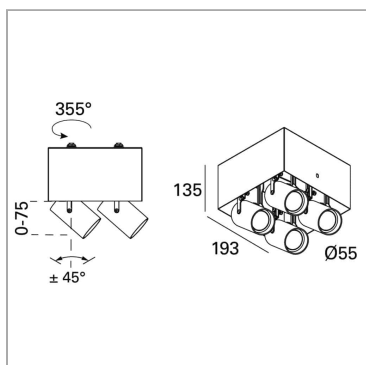

WEB PAGE



ASSEMBLY INSTRUCTIONS




MANDATORY ACCESSORIES

Accessori Wallbox Frame for Mini sight 4M

code MSC24

inspectable Frame to Be Fixed and plastered in 15mm height plasterBoard False ceilings




Technical Sheet



Box mini sight 4M

code MSC14

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article MINI INCAS 4M



Technical Sheet



