
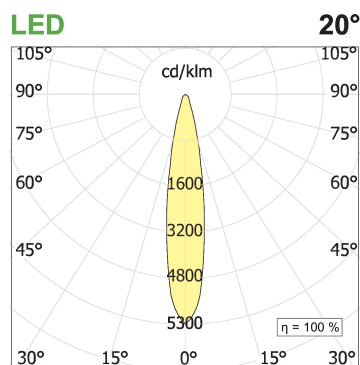
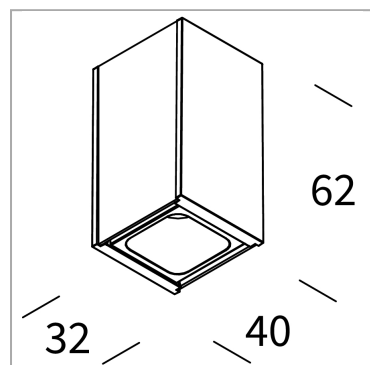


## Leva 1 outdoor Ceiling/wall

code LV021P.927S/01

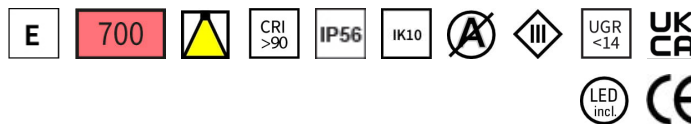

### PRODUCT DESCRIPTION

The revolution in accent lighting LEVA represents the cutting-edge technology in compact spot lighting today available on the market. It's made of an extruded aluminum rectangular profile – the fixture's body – within which are hosted in line a series of optical groups – made of the chip on board led, the lens and the antiglare housing UGR<16 – that may vary in number from 5 to 15, thus allowing to reach a very high luminous flux. LEVA is proposed in several versions. Functionally, the offer ranges from the fixed version, to the adjustable one, to the extractable and adjustable one. The installation alternatives are recessed, track-mounted, surface mounted, and installed within one of the Lucifero's aluminum profiles. What makes of LEVA a unique choice is the extractable and adjustable version, since the sophisticated mechanism that allows the fixture to be extracted and rotated from its housing is studied to let it a series of so versatile movements to reach with light practically any area of the environment to light. chip on board LED, 1,5W UGR <16 each optical group, from 5 to 15 pcs., driver included. Optics: spot and flood. This collection also includes the Work Up floor lamp, designed to offer direct and comfortable light

### PRODUCT SPECS

|                              |                                               |
|------------------------------|-----------------------------------------------|
| Installation method          | Wall surface mounted, Ceiling surface mounted |
| Light source                 | LED                                           |
| Absorbed power               | 2,2 W                                         |
| Color temperature            | 2700K                                         |
| Color rendering index CRI    | >90                                           |
| Optic                        | Spot 20°                                      |
| Finishing                    | White box - black optic                       |
| Luminous flux of the product | 199 lm                                        |
| Luminous efficiency          | 90 lm/W                                       |
| MacAdam color tolerance      | 2                                             |
| Life time estimate           | 50000h Ta 25° L90B10                          |
| Energy efficiency class      | E                                             |
| Weight                       | 0.16 Kg                                       |
| Dimension                    | L40xW32xH62 mm                                |
| IP Grade                     | Ip56 / Ip56                                   |
| Protection Class             | Class III appliance                           |
| Power supply/Transformer     | Not included                                  |
| Protocol                     | See power supply                              |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## **MANDATORY ACCESSORIES**

### **AE700.11C**



code AE700.11C

Electronic power supply current

