


Lbs Diffused Light Ceiling

code LB022.840D/01

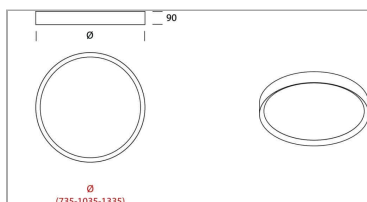

PRODUCT DESCRIPTION

LBS is a thin band of extruded aluminium section and it is possible to install it in many different ways. It consists of basic modules and, depending on the way they are assembled, it can be arch shaped (to be installed on a wall), circular shaped (to create swinging, ceiling and trimless recessed fixtures) or it may have a curving shape (to form a band which twists and turns on the ceiling, for instance). The extruded part, representing its body, is drawn in such a way to be able to house the linear LED light source, shaded with a white opal diffuser, both on the inside vertical side and therefore to give out light on its horizontal axis, and on its narrower and horizontal side and consequently to give out light on its vertical axis (indirect one). It is also available in ceiling, pendant and trimless recessed version with diffused direct light emission. Additionally, LBS also allows to make use of directional projectors, that can be hooked and wired to the profile.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	96 W
Color temperature	4000K
Color rendering index CRI	80
Finishing	White
Luminous flux of the product	7254 lm
Luminous efficiency	76 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	Ø1035 mm
IP Grade	IP40
Product Spec	Circular shape
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Lsb Optional upper cover for LB021/31

code LB051

uncategorized

Technical Sheet



Accessori Lsb Optional upper cover for LB022/32

code LB052

uncategorized

Technical Sheet



Accessori Lsb Optional upper cover for LB023/33

code LB053

uncategorized

Technical Sheet



