

Focus Mini Track 2T36

code FS552.930FD/01





















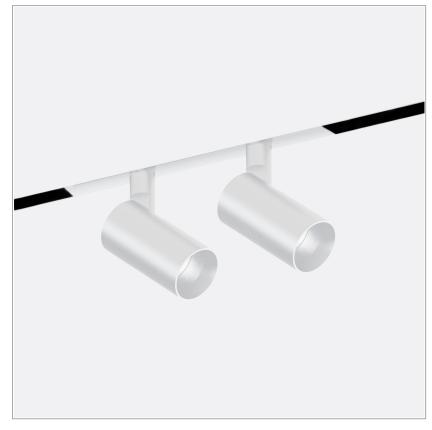

166



PRODUCT DESCRIPTION

Double cylindrical projector in extruded aluminium for installation on Mini Track System, electrified track in very low voltage; installation and positioning by means of quickcoupling insertion tools free; adjustable on the vertical axis of 355 and on the horizontal axis of +/- 90; powder coating or galvanic treatment; with COB (Chip on Board) technology for maximum efficiency; absence of multiple shadows; energy efficient LEDs with high color rendering; on-board electronic converter with Dali2 DT8 2-channel protocol; rear optical group; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; hot plug protection and power supply without respect for polarity; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish white.

PRODUCT SPECS

| Installation method | Track |
|------------------------------|---------------------------------|
| Light source | LED |
| Absorbed power | 2x8 W |
| Color temperature | 3000K |
| Color rendering index CRI | >90 |
| Optic | Flood 28° |
| Finishing | White |
| Luminous flux of the product | 1114 lm |
| Luminous efficiency | 70 lm/W |
| MacAdam color tolerance | 3 |
| Life time estimate | 3SDCM 50000h L90 B10 Ta 25°C |
| Protocol | Dimmable Dali |
| Energy efficiency class | E |
| Dimension | W166xH92 Ø36 mm |
| IP Grade | IP20 |
| Protection Class | Class III appliance |
| Power supply/Transformer | Not included |
| Protocol | See power supply |

WEB PAGE



ASSEMBLY INSTRUCTIONS

