


## Step Outdoor 75

code LT1983BCIP/01

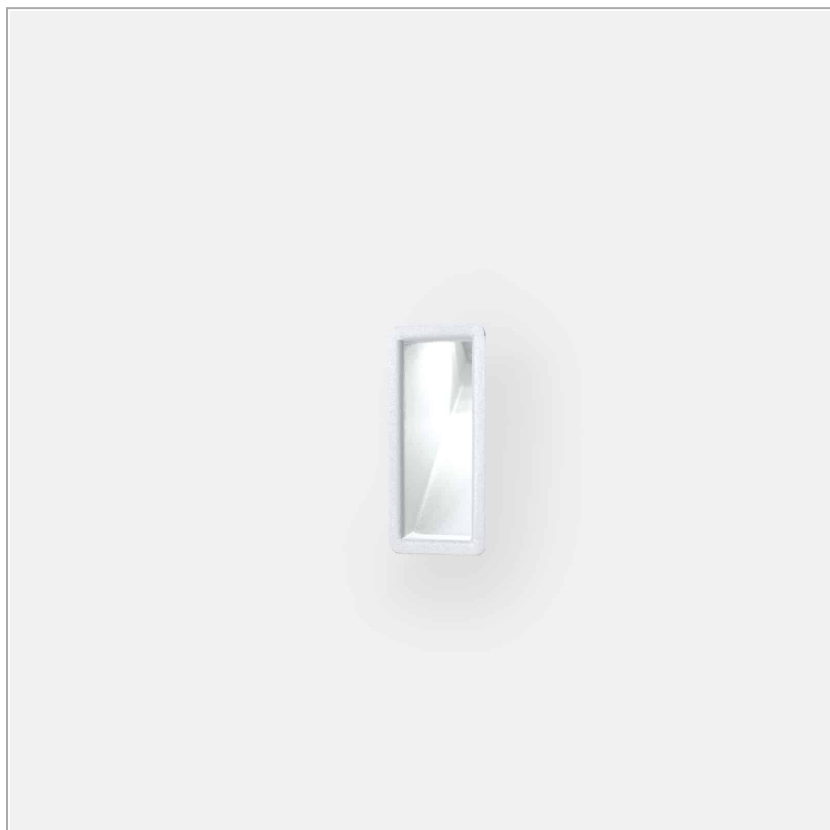


### PRODUCT DESCRIPTION

Recessed fixture designed with square frame. The light is direct with an angle of 45°

### PRODUCT SPECS

|                              |                                           |
|------------------------------|-------------------------------------------|
| Installation method          | Recessed with frame, Wall surface mounted |
| Light source                 | LED                                       |
| Absorbed power               | 1,5 W                                     |
| Color temperature            | 3000K                                     |
| Color rendering index CRI    | 90                                        |
| Finishing                    | White                                     |
| Luminous flux of the product | 252 lm                                    |
| Luminous efficiency          | 168 lm/W                                  |
| MacAdam color tolerance      | 3                                         |
| Life time estimate           | 50000h L80 B10 ta 25°C                    |
| Energy efficiency class      | E                                         |
| Weight                       | 0.2 Kg                                    |
| Dimension                    | W27xH75 mm                                |
| Hole size                    | 29X69 mm                                  |
| IP Grade                     | IP65                                      |
| Protection Class             | Class III appliance                       |
| Power supply/Transformer     | Not included                              |
| Protocol                     | See power supply                          |

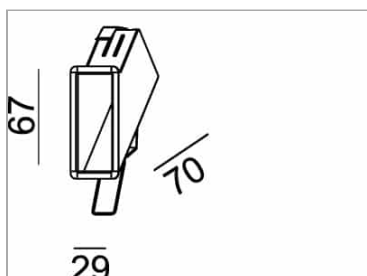

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### Accessori Wallbox Wallbox step 75



code LT1992

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article STEP 75

Technical Sheet



