

Ipipedi Q Wall GU10 double emission

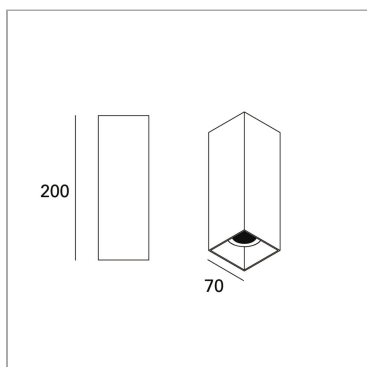
code PPQ12/01

**PRODUCT DESCRIPTION**

Wall and ceiling –mounted lighting fittings with direct or direct/indirect lighting emission. For 230V QPAR16 GU10 or QT14C G9 halogen/LED lamps. Body in painted extruded aluminum of square cross-section. Complete with ceiling or wall fixing bracket. Degree of protection IP20.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	GU10
Absorbed power	max 2x50 W
Color rendering index CRI	Depending on the bulb (not included)
Finishing	White
Luminous flux of the product	Depending on the bulb (not included)
Luminous efficiency	Depending on the bulb (not included)
Energy efficiency class	E-G
Dimension	L70xW70xH200 mm

**WEB PAGE****ASSEMBLY INSTRUCTIONS**

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1