

Ci 50 adjustable for plasterboard or brick wall

code LT1170.940W/01





PRODUCT DESCRIPTION

Round recessed wall/ceiling spotlight with directional lamp support

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	8 W / 12 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Wide 46°
Finishing	White
Luminous flux of the product	1089 lm / 1333 lm
Luminous efficiency	136 lm/W / 111 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Dimension	H100 Ø77 mm
Hole size	Ø70 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Adjustable, Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

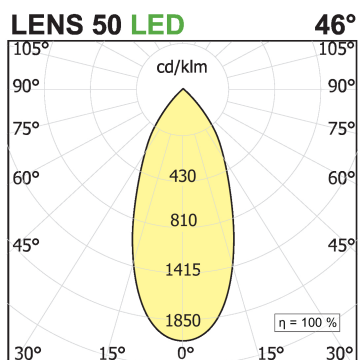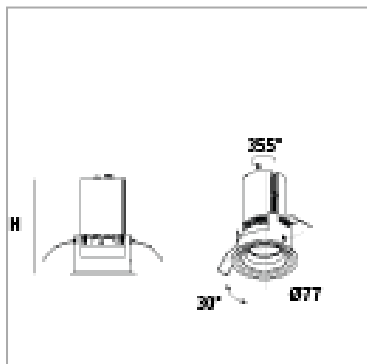

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.


Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

OPTIONAL ACCESSORIES

Accessori Wallbox Wallbox CI50 e CI50/50F



code LT9062.1

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article CI50 and CI50F

Technical Sheet

