

Microfile mini track 48V

code MF112.830D/01




PRODUCT DESCRIPTION


Direct light lamp with connection for Minitrack 24V (rail not included) made of extruded aluminium 6060; complete with led; colour rendering index CRI >90. Professional led modules 26.4 W high performance, protocol [protocol]. Lamp with white colour finish; [diffusore] in polycarbonate with diffusing film. Protection degree IP40.

PRODUCT SPECS

Installation method	Mini Track
Light source	Linea Led
Absorbed power	26,4 W
Color temperature	3000K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	1688 lm
Luminous efficiency	64 lm/W
Protocol	Dimmable Dali / Touch & Dimm
Energy efficiency class	D
Dimension	L1220 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

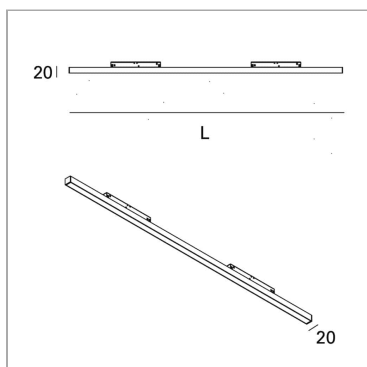

MICROFILE LED

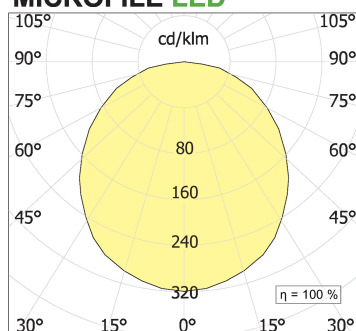

WEB PAGE



ASSEMBLY INSTRUCTIONS

