

## Microfile mini track 48V

code MF112.830/01




### PRODUCT DESCRIPTION


Direct light lamp with connection for Minitrack 24V (rail not included) made of extruded aluminium 6060; complete with led; colour rendering index CRI >90. Professional led modules 26.4 W high performance, protocol [protocol]. Lamp with white colour finish; [diffusore] in polycarbonate with diffusing film. Protection degree IP40.

### PRODUCT SPECS

|                              |                     |
|------------------------------|---------------------|
| Installation method          | Mini Track          |
| Light source                 | Linea Led           |
| Absorbed power               | 26,4 W              |
| Color temperature            | 3000K               |
| Color rendering index CRI    | >80                 |
| Finishing                    | White               |
| Luminous flux of the product | 1688 lm             |
| Luminous efficiency          | 64 lm/W             |
| Protocol                     | On/Off              |
| Energy efficiency class      | D                   |
| Dimension                    | L1220 mm            |
| IP Grade                     | IP40                |
| Protection Class             | Class III appliance |
| Power supply/Transformer     | Not included        |
| Protocol                     | See power supply    |

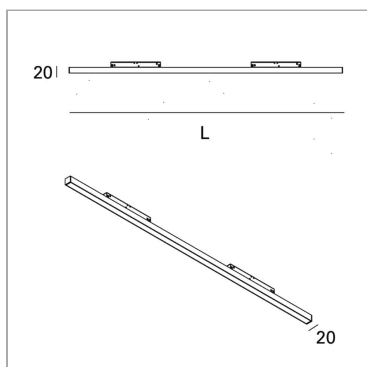

### MICROFILE LED

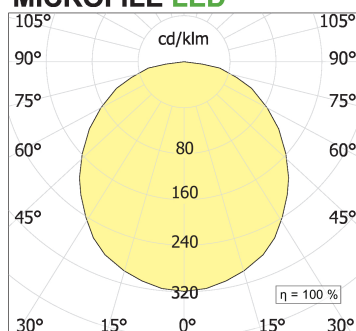

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

