


Microfile deep recessed track 48V

code MF212.827D/01

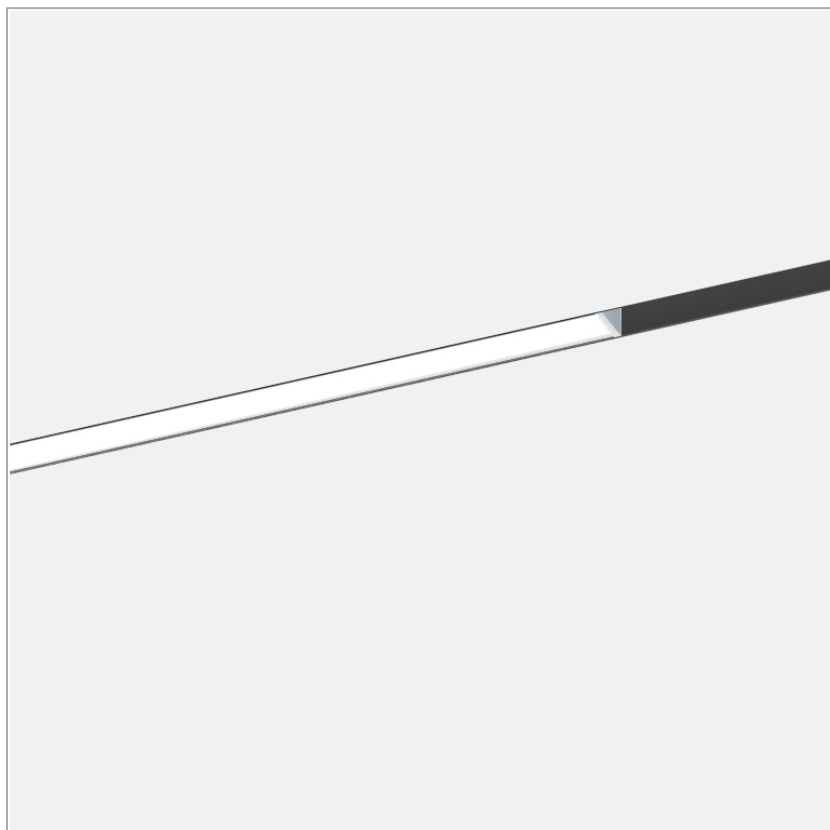


PRODUCT DESCRIPTION

Direct backlight lamp with connection for Minitrack 48V (rail not included) made of extruded aluminium 6060 with square section measuring 19,8x19,5 mm; complete with led; colour rendering index CRI >90. Professional led modules 26.4 W high performance; protocol vedi alimentatore. Epoxy powder coated with white color finish; complete with polycarbonate [diffusore] with diffusing film. Degree of protection IP40.

PRODUCT SPECS

Installation method	Mini Track
Light source	Linea Led
Absorbed power	26,4 W
Color temperature	2700K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	1688 lm
Luminous efficiency	64 lm/W
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L1220 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

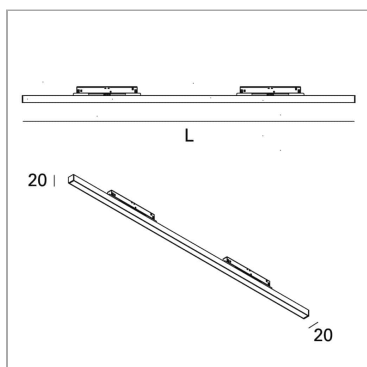

MICROFILE LED



WEB PAGE



ASSEMBLY INSTRUCTIONS

