


## Miniframe Recessed 50

code LT4118.930W/01

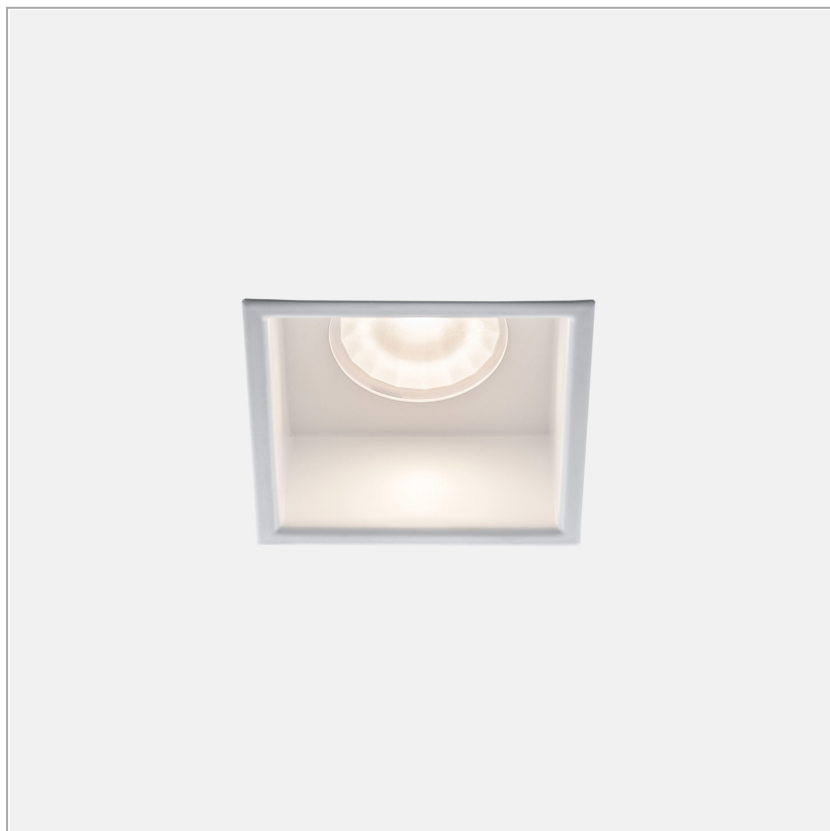


### PRODUCT DESCRIPTION

Wall and ceiling recessed luminaire, fixed for integrated LED source. Remote power available as accessory. Body and frame of super-slim 5 mm width. painted metal. Installable to plasterboard. Protection degree IP20/IP23.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Recessed with frame         |
| Light source                 | LED                         |
| Absorbed power               | 12 W / 18 W                 |
| Color temperature            | 3000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Wide 46°                    |
| Finishing                    | White                       |
| Luminous flux of the product | 1289 lm / 2257 lm           |
| Luminous efficiency          | 107 lm/W / 125 lm/W         |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Protocol                     | On/Off                      |
| Energy efficiency class      | D                           |
| Dimension                    | L80xW130xH80 mm             |
| Hole size                    | 72X72 mm                    |
| IP Grade                     | IP20                        |
| Protection Class             | Class III appliance         |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

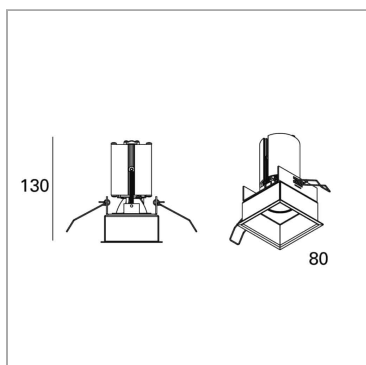

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### Accessori Wallbox Wallbox miniframe 50 just for GU10 version



code LT4102.CC

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article MINIFRAME 50

Technical Sheet



