


Miniframe Recessed 50

code LT4118.940F/01


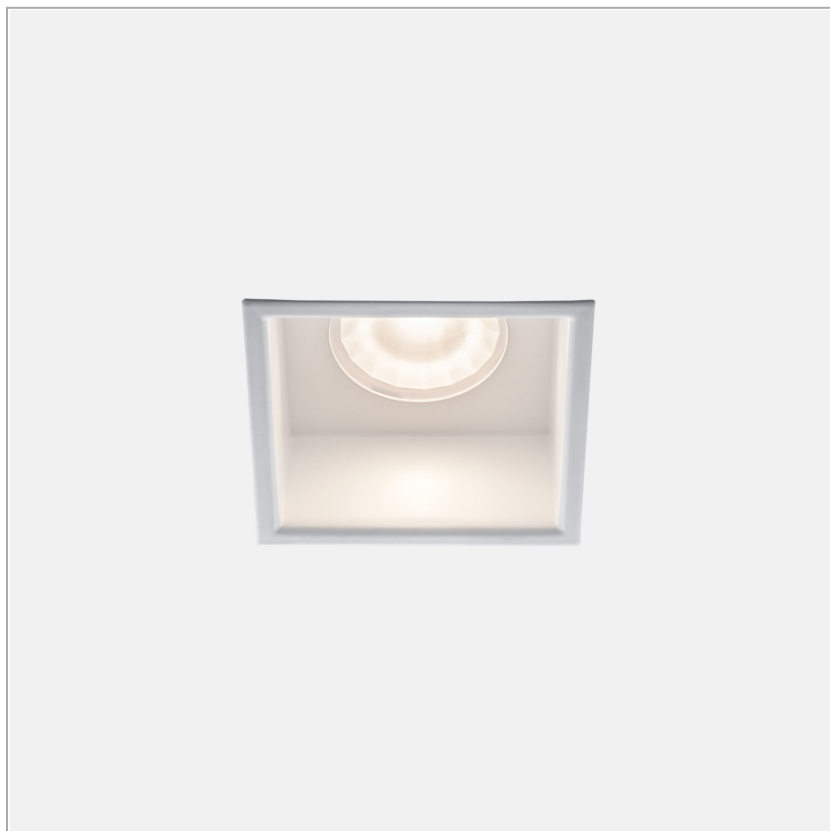


PRODUCT DESCRIPTION

Wall and ceiling recessed luminaire, fixed for integrated LED source. Remote power available as accessory. Body and frame of super-slim 5 mm width. painted metal. Installable to plasterboard. Protection degree IP20/IP23.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	12 W / 18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1333 lm / 2285 lm
Luminous efficiency	111 lm/W / 127 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	On/Off
Energy efficiency class	D
Dimension	L80xW130xH80 mm
Hole size	72X72 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

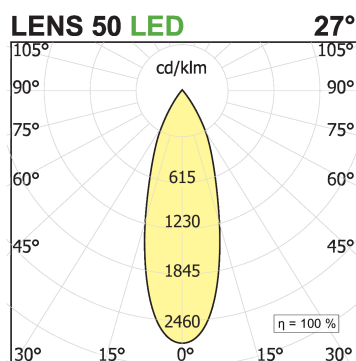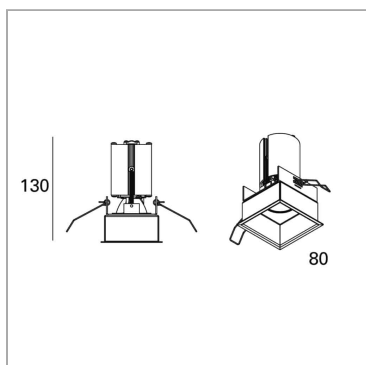

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Wallbox Wallbox miniframe 50 just for GU10 version



code LT4102.CC

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article MINIFRAME 50

Technical Sheet



