
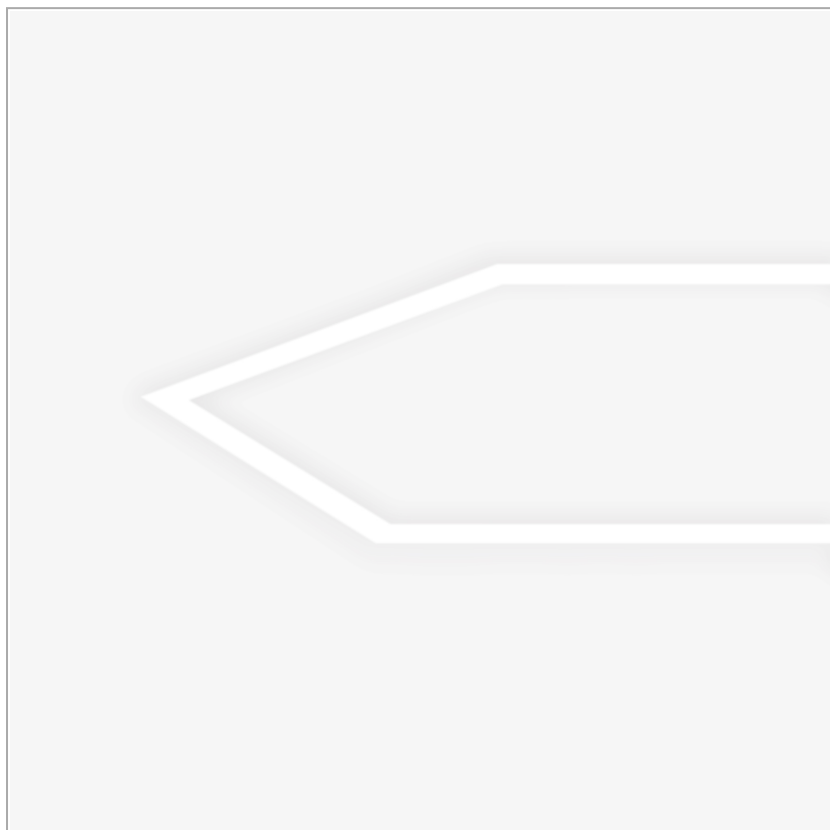


## Microfile H Exagonal recessed

code MFH331.830/01





### PRODUCT DESCRIPTION

Lighting body composed of extrusion profile of aluminum section 20x34,5mm hexagonal shape 802x695mm, recessed installation for direct floodlighting, complete with silicone screen, epoxy powder coated version white. Linear LED source 45 WW to be completed with 24vdc remote power supply. Degree of protection IP44.

### PRODUCT SPECS

|                              |                     |
|------------------------------|---------------------|
| Installation method          | Trimless recessed   |
| Light source                 | Linea Led           |
| Absorbed power               | 45 W                |
| Color temperature            | 3000K               |
| Color rendering index CRI    | >80                 |
| Finishing                    | White               |
| Luminous flux of the product | 2396 lm             |
| Luminous efficiency          | 53 lm/W             |
| Energy efficiency class      | D                   |
| Weight                       | 1.5 Kg              |
| Dimension                    | L695xW802 mm        |
| IP Grade                     | Ip44                |
| Protection Class             | Class III appliance |
| Power supply/Transformer     | Not included        |
| Protocol                     | See power supply    |

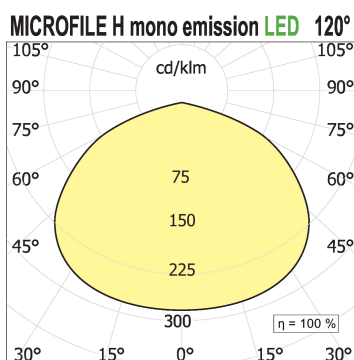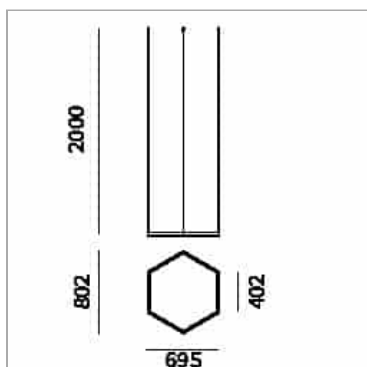

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### **Lbs System Canopy for housing driver**



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

**Technical Sheet**



### **Lbs System Canopy for plasterboard false-ceiling**

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling

**Technical Sheet**



### **Accessori Joints for Microfile H exagonal**

code MFH080

uncategorized

**Technical Sheet**



code MFH081

uncategorized

**Technical Sheet**

