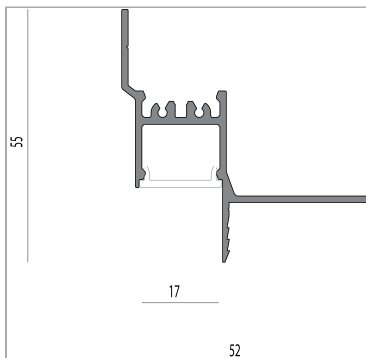
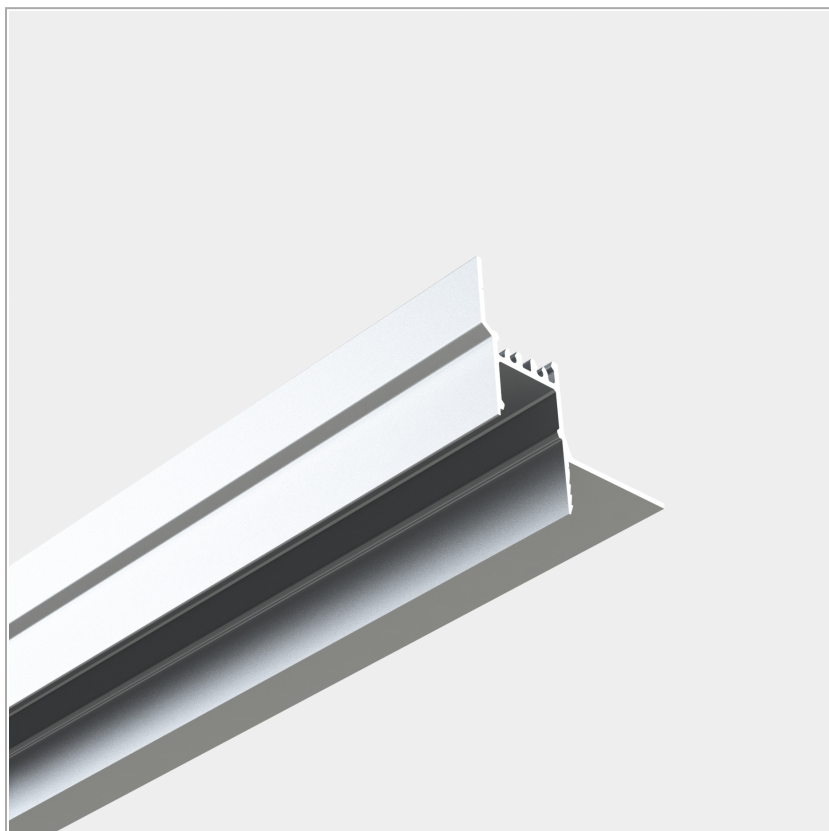


**Microfile Empty perimetric recessed
profile**

code MF41.3000/01

**PRODUCT DESCRIPTION**

Modular system for direct, diffused and/or accent lighting, made of painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or to be trimless-recessed in external and internal angles. For direct diffused lighting. Body in extruded aluminium. Painted or anodized finish. Complete with Light Proof system side end caps, opal white polycarbonate diffusing screen. and mounting brackets or suspension cables. Available in predefined lengths or cut to measure. To be integrated with linear LED sources . IP40 or 43 degree of protection according to the area where it is installed.

PRODUCT SPECS

Installation method	system
Finishing	White
Weight	2.60 Kg
Dimension	L3000xW17xH55 mm

WEB PAGE**ASSEMBLY
INSTRUCTIONS**

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 4

OPTIONAL ACCESSORIES

Couple of closure heads for perimeter recessed profile



code MF41TI/01

Modular system for direct, diffused and/or accent lighting, made of painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or to be trimless-recessed in external and internal angles. For direct diffused lighting. Body in extruded aluminium. Painted or anodized finish. Complete with Light Proof system side end caps, opal white polycarbonate diffusing screen. and mounting brackets or suspension cables. Available in predefined lengths or cut to measure. To be integrated with linear LED sources . IP40 or 43 degree of protection according to the area where it is installed.

Technical Sheet



Diffuser opal direct/indirect depending on family

Opal diffuser direct for Microfile, indirect for File 30 and Pro Edge, direct/indirect for Microfile H



code MF00P.1000

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to 1000 mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet



code MF00P.2000

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to 2000 mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet



code MF00P.3000

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to 3000 mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet



code MF00P.misura

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet



Microfile System – Silicone diffuser

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 2 / 4



code MFH00TH.misura

Silicone diffuser, to choose, to replace the polycarbonate (already included in the profile), in case you want a different light shield.

Technical Sheet



