


## Leva Quadra Wall/ceiling Q9 adjustable

code LV333.927S/01

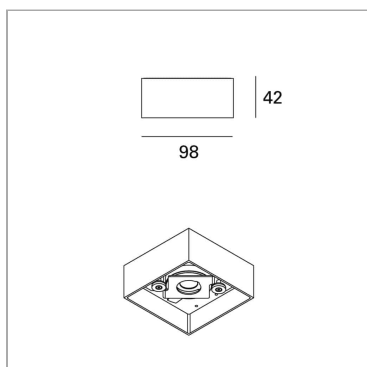

### PRODUCT DESCRIPTION

Collection of indoor and outdoor luminaires with integrated LED sources. Possibility of recessed mounting, with base, ceiling or with magnet. Luminaire body in extruded painted aluminum. Anti-glare optics complete with LED chip on board (CRI>90) and lenses. Spot, flood, wideflood optics. Availability of accessories such as snooter and pyramidal covers. Complete with remote electronic power supplies.

### PRODUCT SPECS

|                              |                                                  |
|------------------------------|--------------------------------------------------|
| Installation method          | Wall surface mounted,<br>Ceiling surface mounted |
| Light source                 | LED                                              |
| Absorbed power               | 9x2,2 W                                          |
| Color temperature            | 2700K                                            |
| Color rendering index CRI    | >90                                              |
| Optic                        | Spot 20°                                         |
| Finishing                    | White box - black optic                          |
| Luminous flux of the product | 1783 lm                                          |
| Luminous efficiency          | 90 lm/W                                          |
| MacAdam color tolerance      | 2                                                |
| Life time estimate           | 50000h Ta 25° L90B10                             |
| Protocol                     | On/Off                                           |
| Energy efficiency class      | E                                                |
| Weight                       | 0.90 Kg                                          |
| Dimension                    | L98xW98xH43 mm                                   |
| IP Grade                     | IP20                                             |
| Protection Class             | Class III appliance                              |
| Power supply/Transformer     | Not included                                     |
| Protocol                     | See power supply                                 |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

Page 1 / 1