


## File 30 Suspension double emission

code F3043.830X/01

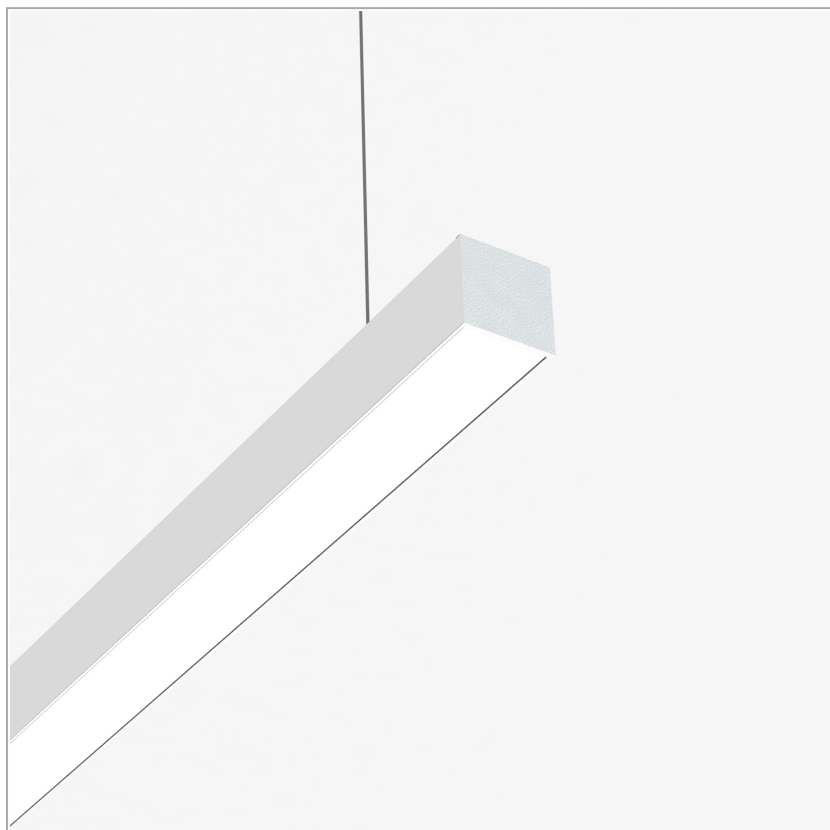


### PRODUCT DESCRIPTION

Lamp with direct and indirect light from indoor suspension, extruded aluminum profile 30x30mm, color rendering index CRI>80. Epoxy powder coating, colour finish white. Product complete with end and side cast caps in the same finish. Degree of protection IP20. Requires remote system for electronic power supply.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | Suspension              |
| Light source                 | Linea Led               |
| Absorbed power               | 34,3 W / 16,8 W         |
| Color temperature            | 3000K                   |
| Color rendering index CRI    | >90 / >80               |
| Optic                        | Microprismatic diffuser |
| Finishing                    | White                   |
| Luminous flux of the product | 4340 lm / 844 lm        |
| Luminous efficiency          | 127 lm/W / 50.23 lm/W   |
| MacAdam color tolerance      | 3                       |
| Weight                       | 1.10 Kg                 |
| Dimension                    | L1564 mm                |
| IP Grade                     | IP40                    |
| Protection Class             | Class III appliance     |
| Power supply/Transformer     | Not included            |
| Protocol                     | See power supply        |

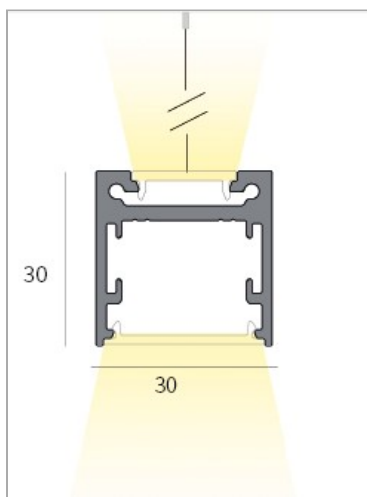

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### Microfile System Ower cable (L.2000mm) kit with ceiling canopy DRIVER INCLUDED



code MFH00SA/01

system indoor item. Bianco finishing item

Technical Sheet



code MFH00SB/01

system indoor item. Bianco finishing item

Technical Sheet

