
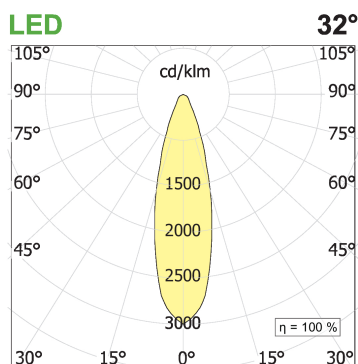
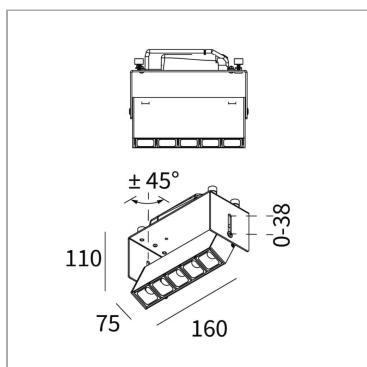


## Leva System Tilt module B5

code LV092K.927FD/01

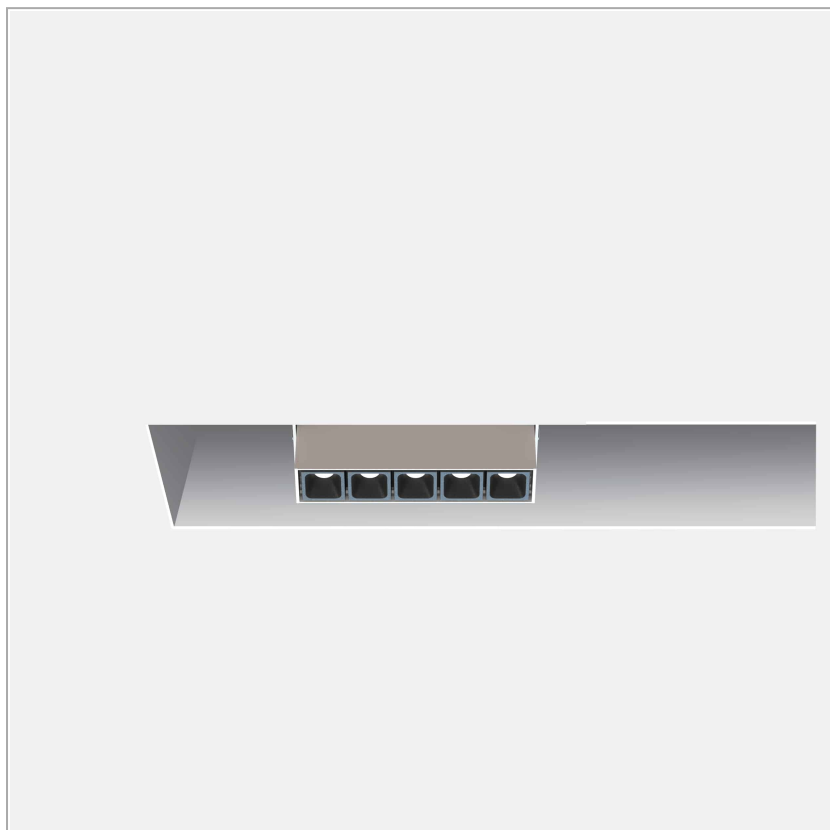

### PRODUCT DESCRIPTION

Fix and adjustable projectors programme for chip on board LED sources. Mounting options: with frame and trimless recessed, ceiling and wall-mounted, 230V Eurostandard track and within the Lucifero's Container for Minifile and File 2. Fixture's body in painted extruded aluminum. Optical group complete with chip on board led, lens, antiglare housing and driver (except recessed versions and 1x and 3x ceiling/wall-mounted versions). Adjustable version for ceiling/wall mounting and for insertion within the Container for Minifile provided with special patented Soft Rotate & Slide mechanism, that allows the projector's extraction and aiming of 350° on the vertical axis and of 350° on the horizontal axis. Adjustable version for insertion within the Container for File 2 provided with special tilt mechanism, that allows the projector's extraction and aiming of  $\pm 45^\circ$  on the horizontal axis. Spot, flood and wide optics. UGR<19. Degree of protection IP23/43.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | system                  |
| Light source                 | LED                     |
| Absorbed power               | 5x2,2 W                 |
| Color temperature            | 2700K                   |
| Color rendering index CRI    | >90                     |
| Optic                        | Flood 32°               |
| Finishing                    | White box - black optic |
| Luminous flux of the product | 1075 lm                 |
| Luminous efficiency          | 98 lm/W                 |
| MacAdam color tolerance      | 2                       |
| Life time estimate           | 50000h Ta 25° L90B10    |
| Protocol                     | Dimmable Dali           |
| Energy efficiency class      | E                       |
| Weight                       | 1.67 Kg                 |
| Dimension                    | L160xW75xH110+38 mm     |
| IP Grade                     | IP20                    |
| Power supply                 | 220-240V 50-60Hz        |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## **MANDATORY ACCESSORY ACCORDING TO THE TYPE OF INSTALLATION**

### **Box Leva 5 tilting**



code LV005B/01

Trimless recessed uncategorized wallbox for brick wall / wallbox for false ceiling. Bianco finishing wallbox for brick wall / wallbox for false ceiling

**Technical Sheet**

