

File Flex Outdoor Circle Suspension V500

code FXG21.830/01




PRODUCT DESCRIPTION

Family of outdoor lighting fixtures - floor, wall, ceiling or suspended –realized by extruded aluminum profiles with curvilinear shapes. Versions with LED linear source with extruded opal flexible silicone screen for diffused light and versions with multi-optic LED modules of the Leva series for accent lighting are available. IP66.

PRODUCT SPECS

Installation method	Suspension
Light source	linear LED 18W/mt 168 LED/mt 1590/mt IP65
Absorbed power	27 W
Color temperature	3000K
Finishing	White
Luminous flux of the product	2405 lm
Luminous efficiency	89 lm/W
Protocol	On/Off
Energy efficiency class	D
Weight	2.8 Kg
Dimension	Ø500 mm
IP Grade	IP65
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

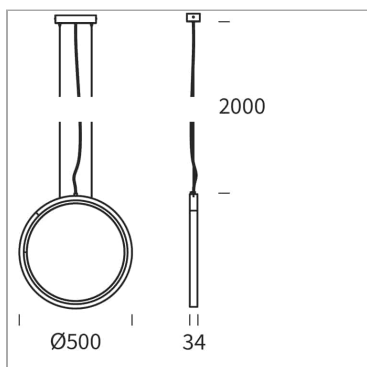

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

