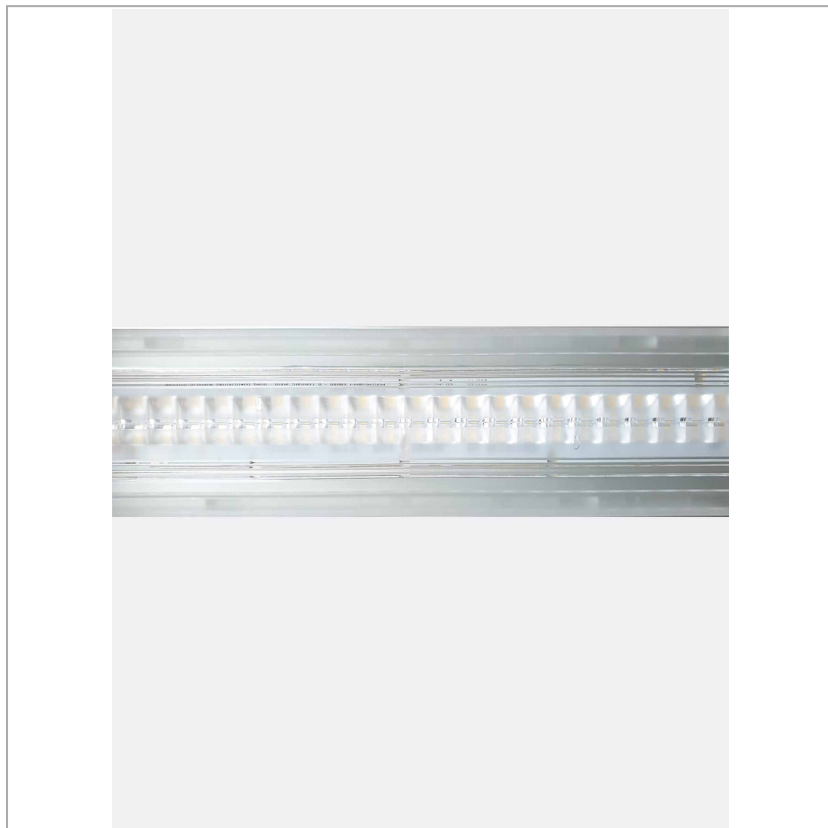


**Fifty5 System - Reglette LED Pro**

code FT051.940EWD

**PRODUCT DESCRIPTION**

Modular system, in extruded aluminum 55x55mm, for ceiling installation, suspension and recessed trimless (through the use of special accessories) to complete with the necessary dedicated accessories. Textured or anodized painted finish. Diffused light screens in opal polycarbonate, professional optics with different beam openings and, if necessary, equipped with spectra for horticulture and tunable white TW. Possibility of insertion of anti-glare eyelid with patent pending attachment system. Degree of protection IP40

**PRODUCT SPECS**

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | system                          |
| Light source                 | LED                             |
| Absorbed power               | 23,4 W                          |
| Color temperature            | 4000K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Extra wide 110                  |
| Luminous flux of the product | 2990 lm                         |
| Luminous efficiency          | 128 lm/W                        |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                     | Dimmable Dali                   |
| Dimension                    | L570 mm                         |
| IP Grade                     | IP20                            |
| Power supply                 | 220-240V 50-60Hz                |

**WEB PAGE****ASSEMBLY INSTRUCTIONS**