

## Iride Base 114L

code IR07.940FD/01




### PRODUCT DESCRIPTION

Wall/ceiling projector with fixed projection, complete with LED 34 W beam 25°, color rendering index CRI >90. Lamp with color finish white. Body lamp and optical group made of die-cast aluminum powder-coated, aluminum joint, rotation of the optical group of 355 °. on the vertical axis and 90 °. on the horizontal axis. Snooter in lamp finish or finishing choice. High performance lens. Possibility of insertion of Honey Comb filter.

### PRODUCT SPECS

|                              |                                                  |
|------------------------------|--------------------------------------------------|
| Installation method          | Wall surface mounted,<br>Ceiling surface mounted |
| Light source                 | LED                                              |
| Absorbed power               | 34 W                                             |
| Color temperature            | 4000K                                            |
| Color rendering index CRI    | >90                                              |
| Optic                        | Flood 25°                                        |
| Finishing                    | White                                            |
| Luminous flux of the product | 3677 lm                                          |
| Luminous efficiency          | 108 lm/W                                         |
| MacAdam color tolerance      | 3                                                |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C                  |
| Protocol                     | Dimmable Dali                                    |
| Energy efficiency class      | D                                                |
| Dimension                    | Ø114 mm                                          |
| IP Grade                     | IP20                                             |
| Product Spec                 | Adjustable                                       |
| Power supply                 | 220-240V 50-60Hz                                 |

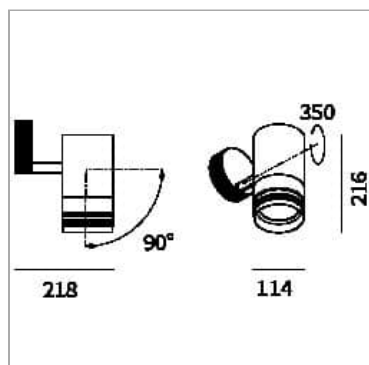

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

