

## Iride Mini Track 43L

code IR08.935W/01





### PRODUCT DESCRIPTION

New collection of adjustable projectors by Mario Cucinella featuring integrated LED sources, ceiling or track mounted (Stucchi tracks) both for mains voltage or 48V. Iride consists of a body in painted die-cast aluminum and an interchangeable ring – in white, black or chrome finishing – for customization. Optical groups complete with high color rendering LEDs (CRI>90), lens, anti-glare housing and electronic driver. Adjustable optical body in the track version, with the 0-90 ° orientation on the horizontal axis and 355 ° on the vertical axis; the surface mounted version offers an additional rotation possibility. Spot, flood and wide optics. IP20.

### PRODUCT SPECS

|                           |                                 |
|---------------------------|---------------------------------|
| Installation method       | Track                           |
| Light source              | LED                             |
| Absorbed power            | 6,7 W                           |
| Color temperature         | 3500K                           |
| Color rendering index CRI | >90                             |
| Optic                     | Wide                            |
| Finishing                 | White                           |
| MacAdam color tolerance   | 2                               |
| Life time estimate        | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                  | On/Off                          |
| Energy efficiency class   | D                               |
| Dimension                 | Ø43 mm                          |
| IP Grade                  | IP20                            |
| Product Spec              | Adjustable                      |
| Power supply/Transformer  | Not included                    |
| Protocol                  | See power supply                |

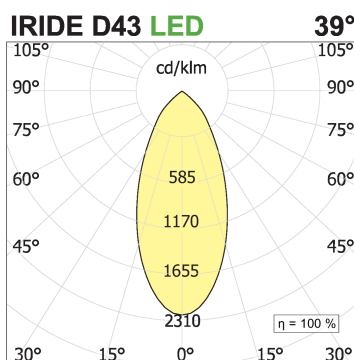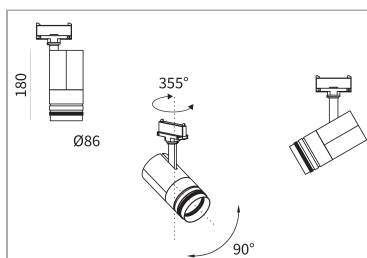

### WEB PAGE




### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### **Lens honey comb louver ø43**



code L043R

