

Iride Mini Track 43L

code IR08.930WD/01





PRODUCT DESCRIPTION

New collection of adjustable projectors by Mario Cucinella featuring integrated LED sources, ceiling or track mounted (Stucchi tracks) both for mains voltage or 48V. Iride consists of a body in painted die-cast aluminum and an interchangeable ring – in white, black or chrome finishing – for customization. Optical groups complete with high color rendering LEDs (CRI>90), lens, anti-glare housing and electronic driver. Adjustable optical body in the track version, with the 0-90 ° orientation on the horizontal axis and 355 ° on the vertical axis; the surface mounted version offers an additional rotation possibility. Spot, flood and wide optics. IP20.

PRODUCT SPECS

Installation method	Track
Light source	LED
Absorbed power	6,7 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Wide 39°
Finishing	White
Luminous flux of the product	742 lm
Luminous efficiency	111 lm/W
MacAdam color tolerance	2
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	Ø43 mm
IP Grade	IP20
Product Spec	Adjustable
Power supply/Transformer	Not included
Protocol	See power supply

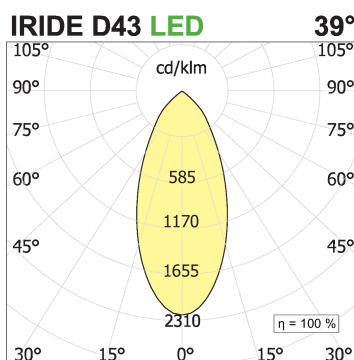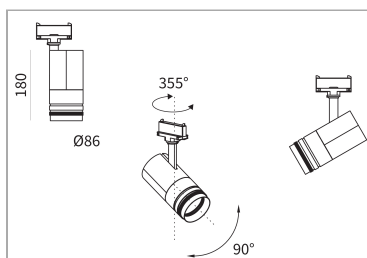

WEB PAGE




ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Lens honey comb louver ø43



code L043R

