

Iride Outdoor 114S

code IR03IP.927SD/01





PRODUCT DESCRIPTION

Outdoor ceiling/wall projector complete with led 34 W, beam 18°, colour rendering index CRI>90. Colour finish white. Body lamp and optical group made of die-cast aluminum powder-coated, aluminum joint, rotation of the optical group of 355 °. on the vertical axis and 90 °. on the horizontal axis. Snoot in lamp finish or finishing choice. High performance lens. Possibility of insertion of Honey Comb filter.

PRODUCT SPECS

Installation method	Wall surface mounted, Ceiling surface mounted
Light source	LED
Absorbed power	34 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Spot 18°
Finishing	White
Luminous flux of the product	2476 lm
Luminous efficiency	73 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	Ø114 mm
IP Grade	IP65
Power supply	220-240V 50-60Hz

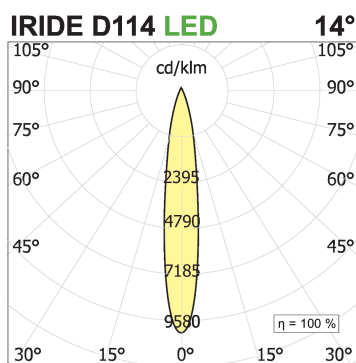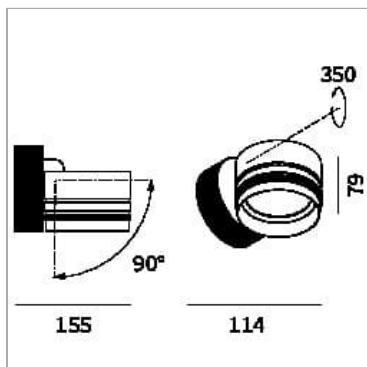

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

