




FLOK WALL/CEILING

code FF25.827/01

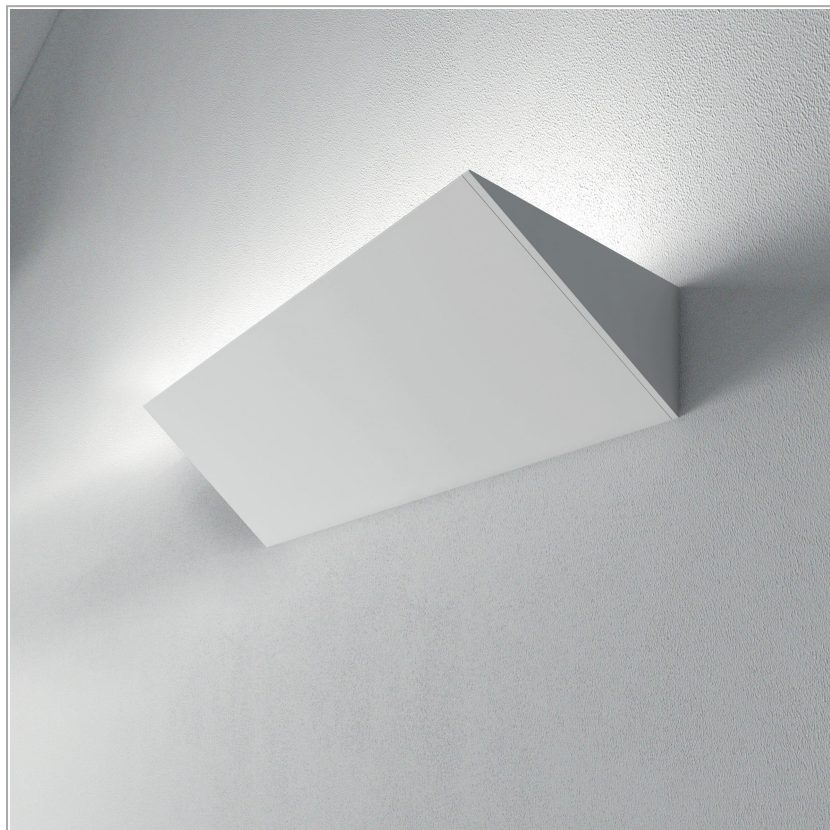

FLOK LED

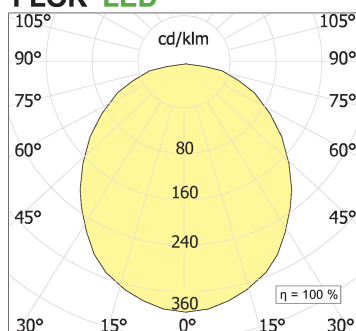

PRODUCT DESCRIPTION

Series of wall-mounted fixtures for direct or indirect lighting, complete with integrated linear LED sources. To be completed with driver, to be installed remote. Body in extruded aluminium, painted finish. Double installation possibility: if fixed by the narrow side, the lighting effect is diffused, if fixed instead by the wide side, the lighting is grazing. Complete with Light Proof system side-end caps, opal white polycarbonate diffuser and mounting brackets. IP65 Degree of protection.

PRODUCT SPECS

Installation method	Wall surface mounted, Ceiling surface mounted
Light source	Linea Led
Absorbed power	25,6 W
Color temperature	2700K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	1459 lm
Luminous efficiency	57 lm/W
MacAdam color tolerance	3
Protocol	On/Off
Dimension	W1144 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS

