

Leva 15 recessed - kit

code LV015K..935Z/01




PRODUCT DESCRIPTION

Integrated LED Chip On Board light fixture. Recessed installation with stop. Luminaire body in extruded painted aluminum white. Optical groups complete with LED chip on board, lens, anti-glare housing. Optics 41°x18° UGR<16. Protection rating IP20.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	15x2,2 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Asymmetric 41°x18°
Finishing	White
Luminous flux of the product	3540 lm
Luminous efficiency	107 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Energy efficiency class	E
Weight	0.30 Kg
Dimension	L450xW27xH60 mm
Hole size	34X456 mm
Power supply/Transformer	Not included
Protocol	See power supply

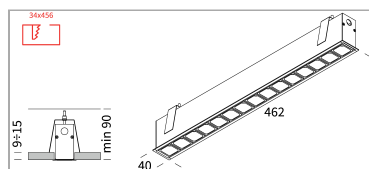

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Accessori Leva Wallbox F 15



code LV015F/01

Recessed with frame uncategorized wallbox for false ceiling. Bianco finishing wallbox for false ceiling

Technical Sheet



AE700.32C1.MP (Copia) (Copia)



code AE700.30C.MP-1

Electronic power supply current

Technical Sheet



OPTIONAL ACCESSORIES

Wallbox for brick wall and concrete – Leva15



code CCLV15

Formwork for masonry and concrete, suitable for Leva15. Internal length 457mm - external length 459,4mm

Technical Sheet

