

#### Leva 3 Outdoor Recessed - kit

Ε





















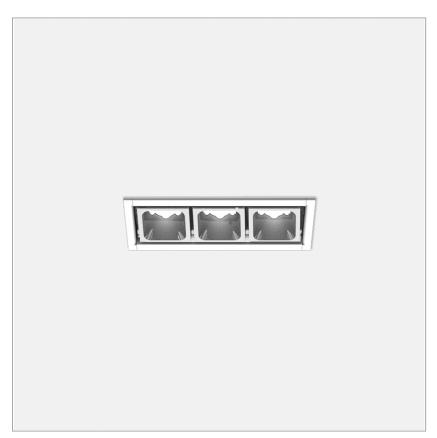



# **PRODUCT DESCRIPTION**

Integrated LED Chip On Board light fixture. Recessed installation with stop. Luminaire body in extruded painted aluminum white. Optical groups complete with LED chip on board, lens, anti-glare housing. Optics 20° UGR<16.

# **PRODUCT SPECS**

Installation method	Recessed with frame
Light source	LED
Absorbed power	3x2,2 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Spot 20°
Finishing	White
Luminous flux of the product	596 lm
Luminous efficiency	90 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Energy efficiency class	E
Weight	0.06 Kg
Dimension	L90xW27xH60 mm
IP Grade	lp56
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply





#### **WEB PAGE**



# **ASSEMBLY**



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

## **MANDATORY ACCESSORIES**

#### Box Leva 3



#### code LV003F/01

Recessed with frame uncategorized wallbox for false ceiling. Bianco finishing wallbox for false ceiling



## AE700.10C



#### code AE700.10C

Electronic power supply current

## **OPTIONAL ACCESSORIES**

#### Wallbox for brick wall and concrete - Leva3



#### code CCLV03

Formwork for masonry and concrete, suitable for Leva3. Internal length 97mm - external length

