

File 2H double emission wall

code F2H15.830PD/01




PRODUCT DESCRIPTION


Direct and indirect light with opal diffuser

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	2x44,8 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	5945 lm
Luminous efficiency	66 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L1985 mm

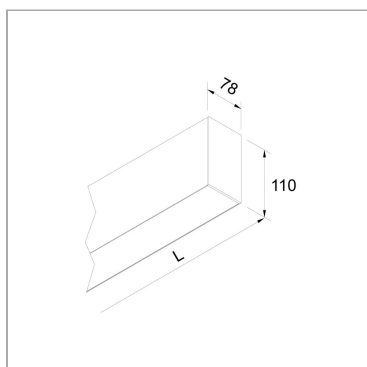

FILE2H opal biemission LED

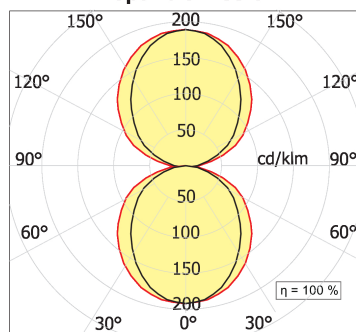

WEB PAGE



ASSEMBLY INSTRUCTIONS

