

File 2H double emission wall

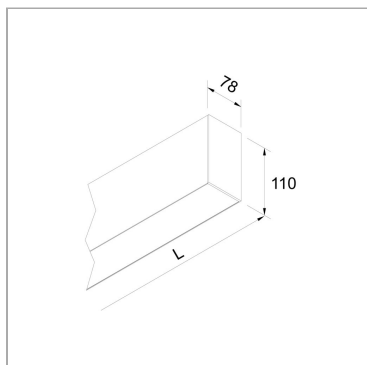
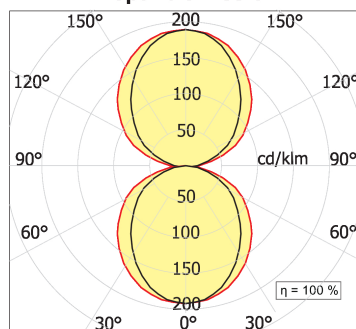
code F2H17.827PD/01

**PRODUCT DESCRIPTION**

Direct and indirect light with opal diffuser

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	2x57,6 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	7644 lm
Luminous efficiency	66 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L2545 mm

**FILE2H opal biemission LED****WEB PAGE****ASSEMBLY INSTRUCTIONS**