
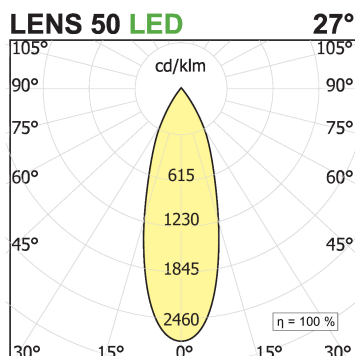
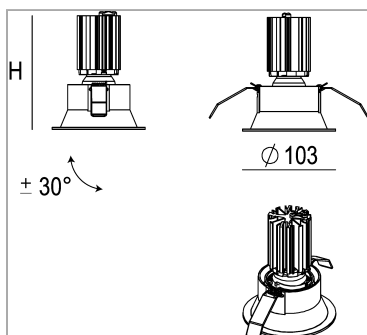


I-KONE recessed frame adjustable

code IK011.930F/01

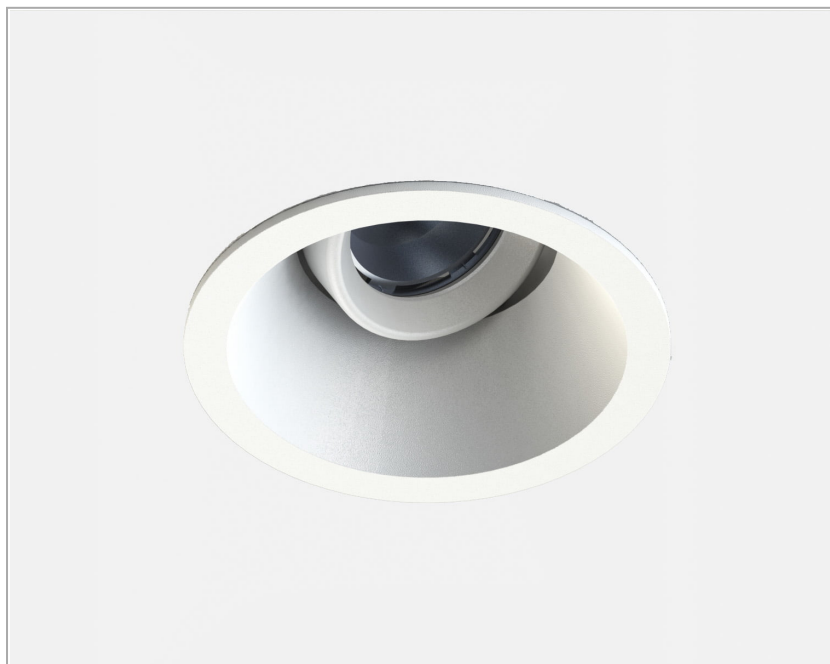

PRODUCT DESCRIPTION

Recessed direct light lamp with circular stop complete with LED 12 W or 18 W secondary optical color white, color rendering index CRI92. Color finish white. Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. 99.9% aluminium finish optics, backlit light source with anti-glare effect; orientation of the automation group of +/- 30°, on the horizontal axis; degree of protection IP20/23. Powder coating.

PRODUCT SPECS

Installation method	recessed with frame
Light source	LED
Absorbed power	12 W / 18 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1285 lm / 2358 lm
Luminous efficiency	107 lm/W / 131 lm/W
MacAdam color tolerance	2
Life time estimate	25000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.35 Kg
Dimension	H131 Ø103 mm
Hole size	Ø 90 mm
IP Grade	Inst. Parete Ip20 / Inst. Soffitto Ip23
Protection Class	Class III appliance
Product Spec	Adjustable
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



