


I-KONE RECESSED MINIMAL ADJUSTABLE

code IK003.930W/01

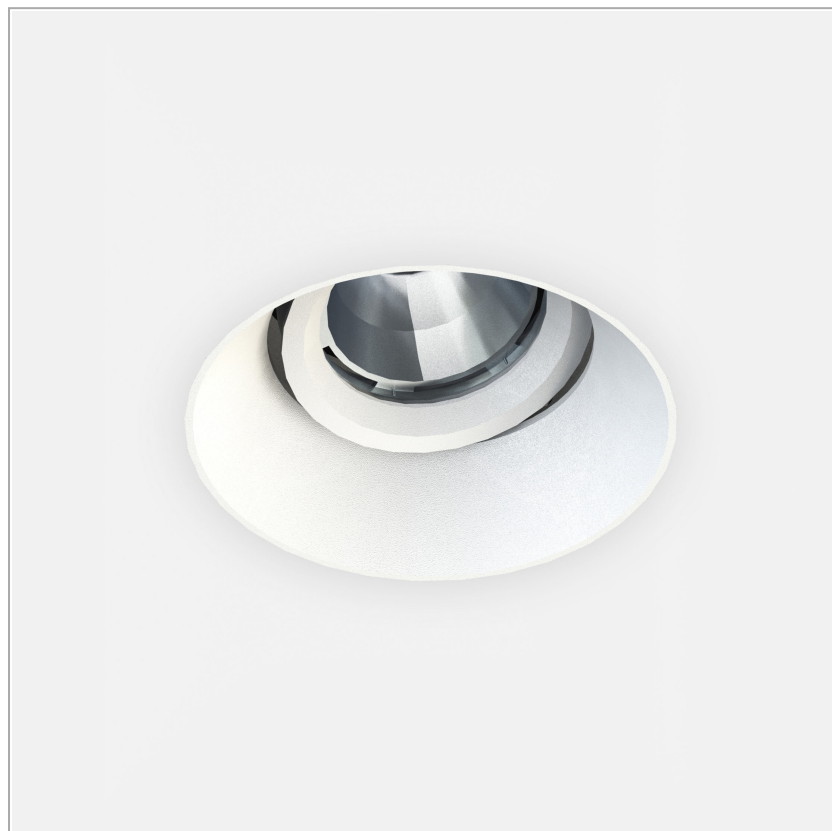


PRODUCT DESCRIPTION

Direct recessed recessed lamp with circular shape, complete with LED 8 W or 12 W secondary colour white, colour rendering index CRI92. Color finish white. Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. 99.9% aluminium finish optics, backlit light source with anti-glare effect; orientation of the automation group of +/- 30, on the horizontal axis; degree of protection IP20/23. Powder coating.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	8 W / 12 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Wide 46°
Finishing	White
Luminous flux of the product	1073 lm / 1285 lm
Luminous efficiency	134 lm/W / 107 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.35 Kg
Dimension	H98 Ø84 mm
Hole size	Ø 70 mm
IP Grade	Inst. Parete Ip20 / Inst. Soffitto Ip23
Protection Class	Class III appliance
Product Spec	Adjustable

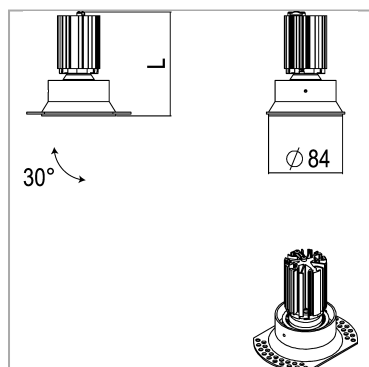

WEB PAGE



ASSEMBLY INSTRUCTIONS



