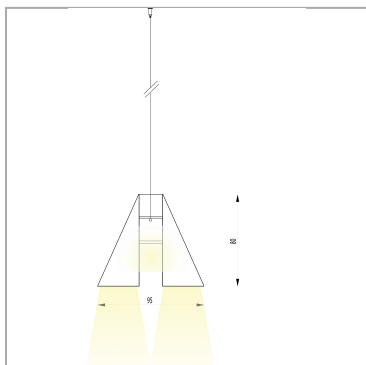
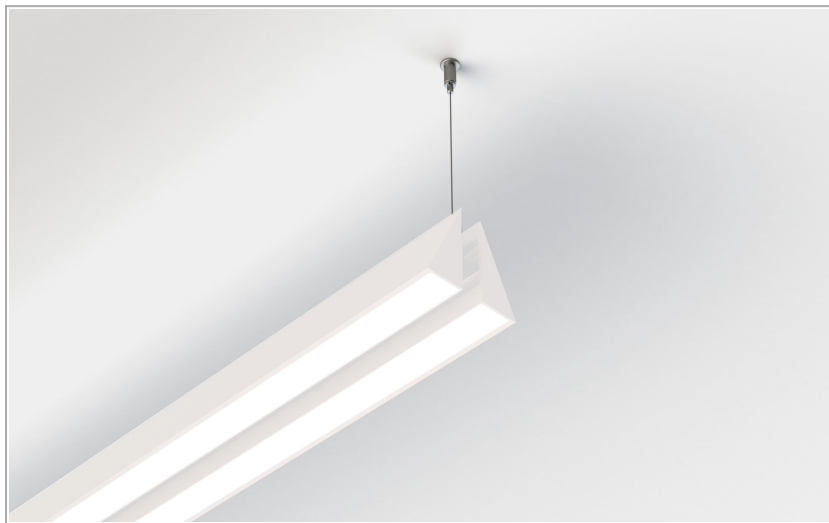


**Flik - double emission direct and indirect white mlight**

code FF54.840/01

**PRODUCT DESCRIPTION**

Series of wall-mounted fixtures for direct or indirect lighting, complete with integrated linear LED sources. To be completed with driver, to be installed remote. Body in extruded aluminium, painted finish. Double installation possibility: if fixed by the narrow side, the lighting effect is diffused, if fixed instead by the wide side, the lighting is grazing. Complete with Light Proof system side-end caps, opal white polycarbonate diffuser and mounting brackets. IP65 Degree of protection.

**PRODUCT SPECS**

|                              |                     |
|------------------------------|---------------------|
| Installation method          | Suspension          |
| Light source                 | Linea Led           |
| Absorbed power               | 20,4 W / 18 W       |
| Color temperature            | 4000K               |
| Color rendering index CRI    | >80                 |
| Finishing                    | White               |
| Luminous flux of the product | 1337 lm / 320 lm    |
| Luminous efficiency          | 66 lm/W / ... lm/W  |
| MacAdam color tolerance      | 3                   |
| Dimension                    | L850 mm             |
| IP Grade                     | IP40                |
| Protection Class             | Class III appliance |
| Power supply                 | 220-240V 50-60Hz    |

**WEB PAGE**

