

Minifile suspension with leva modules

code ML322.927ZD/01




PRODUCT DESCRIPTION

Linear light module with direct emission. 40x66mm extrusion aluminium profile. Equipped with 3 groups LEVA 5 spot series with high color rendering LED sources and mounted on a linear aluminum heatsink; fixed optics with openings available 20 certain. - 32 ill. - 50 ill - 41 ill x18. The structural composition of the optical system results in controlled glare emission ($UGR < 16$). Partial blind screens in aluminium extrusion designed for matching with locking heads on both sides. Electronic power supply system integrated in the luminaire. Optional version with DALI dimming.

Type of suspension installation with steel cables and fitted with millimeter regulators.

PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	10x2,2 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Asymmetric 41°x18°
Finishing	White box - black optic
Luminous flux of the product	2150 lm
Luminous efficiency	98 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	Dimmable Dali
Energy efficiency class	E
Weight	0.9 Kg
Dimension	L1140 mm

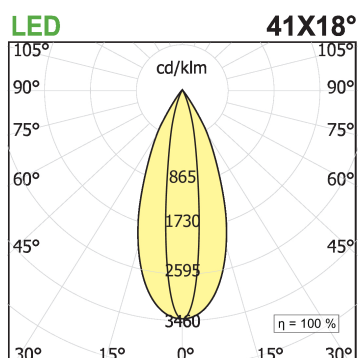

WEB PAGE



ASSEMBLY INSTRUCTIONS

