

Convex recessed frame fisso

code CV019.940F/01




PRODUCT DESCRIPTION

Recessed direct light lamp with circular stop complete with led 12 W or 18 W, color rendering index CRI92. Color finish white. Optical body made of die-cast aluminum, passive dissipation with black anodized aluminum heatsink high thermal efficiency. 99.9% aluminium finish optics, backlit light source with anti-glare effect; degree of protection IP20/23. Powder coated.

PRODUCT SPECS

Installation method	recessed with frame
Light source	LED
Absorbed power	12 W / 18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1380 lm / 2285 lm
Luminous efficiency	115 lm/W / 127 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.35 Kg
Dimension	H110 Ø84 mm
Hole size	Ø 75 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

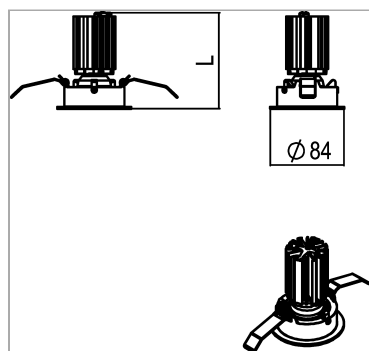

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE350.16C (Copia)



code AE350.15C

Electronic power supply current

AE500.20C1 (Copia)



code AE500.20C.MP

Electronic power supply current

OPTIONAL ACCESSORIES

Optional accessory to transform Convex in trimless recessed



code CV030

Accessory to transform Convex into trimless recessed. 100 mm outer diameter

Technical Sheet

