


Spottino 26

code SO026.930F/01

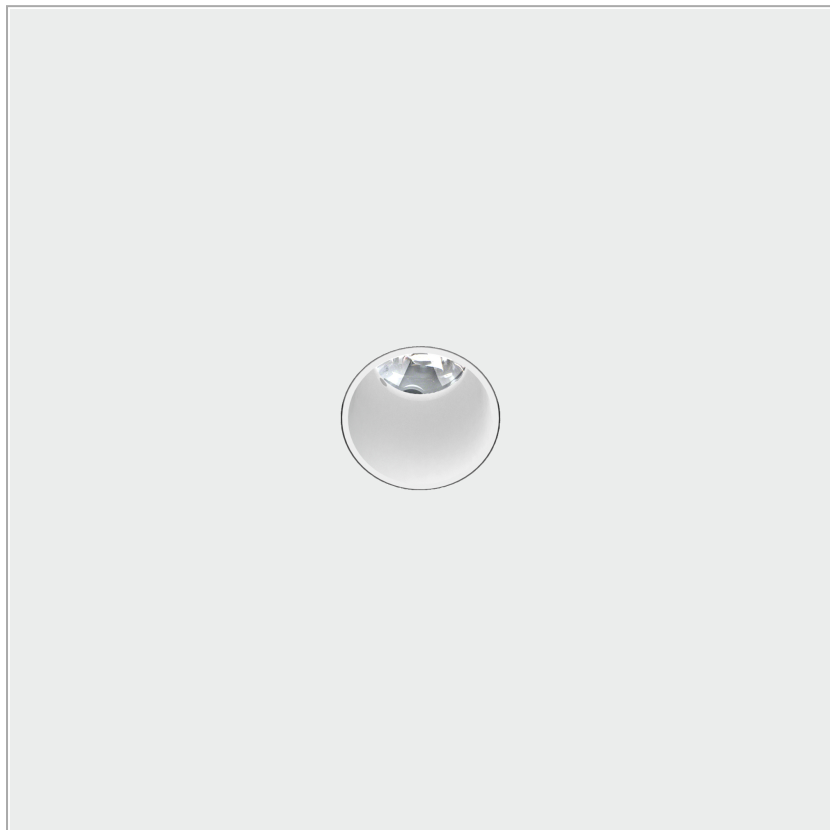


PRODUCT DESCRIPTION

Trimless recessed luminaire for plasterboard, fully concealed, for accent lighting. Backlit light source. Remote power is available as an accessory. Color finish white. The degree of protection is IP40/43.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	5,7 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	571 lm
Luminous efficiency	100 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	E
Dimension	H105 Ø26 mm
IP Grade	Inst. Soffitto Ip43
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

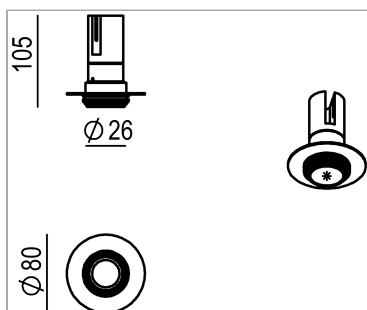

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE500.6C



code AE500.6C

Electronic power supply current

