

## Cubotti F - mini track

code CB001.930SD/01





### PRODUCT DESCRIPTION

Collection of luminaires for a 24V/48V track lighting. Direct light luminaires. Available in a ceiling-mounted version or in a built-in version for ceiling-mounted effect. Square-section body in extruded aluminium with painted finish. IP20 protection rating.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | Mini Track              |
| Light source                 | LED                     |
| Absorbed power               | 4x2,2 W                 |
| Color temperature            | 3000K                   |
| Color rendering index CRI    | >90                     |
| Optic                        | Spot 20°                |
| Finishing                    | White box - black optic |
| Luminous flux of the product | 800 lm                  |
| Luminous efficiency          | 91 lm/W                 |
| MacAdam color tolerance      | 2                       |
| Life time estimate           | 50000h Ta 25° L90B10    |
| Protocol                     | Dimmable Dali           |
| Energy efficiency class      | E                       |
| Weight                       | 0.80 Kg                 |
| Dimension                    | L70x70xH110 mm          |
| IP Grade                     | IP20                    |
| Protection Class             | Class III appliance     |
| Power supply/Transformer     | Not included            |
| Protocol                     | See power supply        |

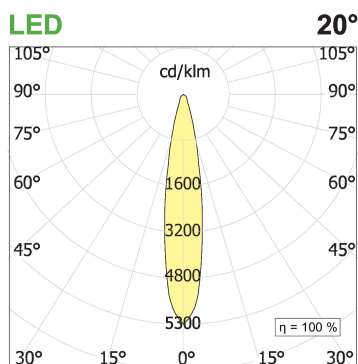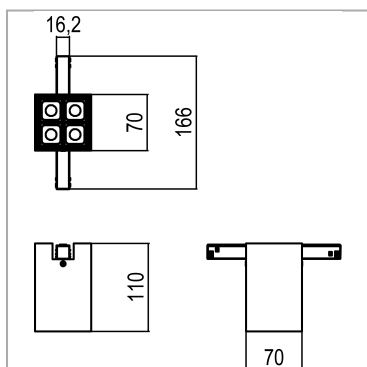

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

