

**Cubotti F - mini track**

code CB001.940FD/01





**PRODUCT DESCRIPTION**

Collection of luminaires for a 24V/48V track lighting. Direct light luminaires. Available in a ceiling-mounted version or in a built-in version for ceiling-mounted effect. Square-section body in extruded aluminium with painted finish. IP20 protection rating.

**PRODUCT SPECS**

Installation method	Mini Track
Light source	LED
Absorbed power	4x2,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 32°
Finishing	White box - black optic
Luminous flux of the product	762 lm
Luminous efficiency	87 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	Dimmable Dali
Energy efficiency class	E
Weight	0.80 Kg
Dimension	L70x70xH110 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

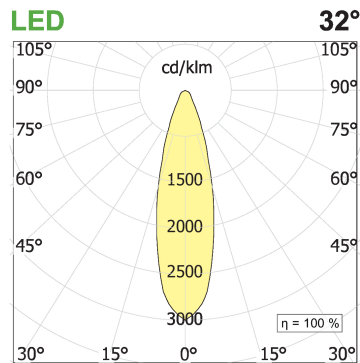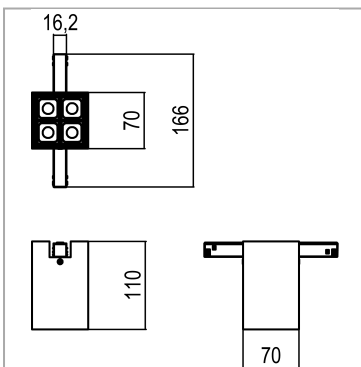

**WEB PAGE**



**ASSEMBLY INSTRUCTIONS**

