

Bucolica spot 36

code BU003.930F/02




PRODUCT DESCRIPTION

Aluminum outdoor floodlight. Ground installation. has a 2-meter-long cable and is adjustable for tilting up to a maximum of 180°.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	8 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	Black
Luminous flux of the product	695 lm
Luminous efficiency	87 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.3 Kg
Dimension	L75xH67 Ø36 mm
IP Grade	Ip66
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

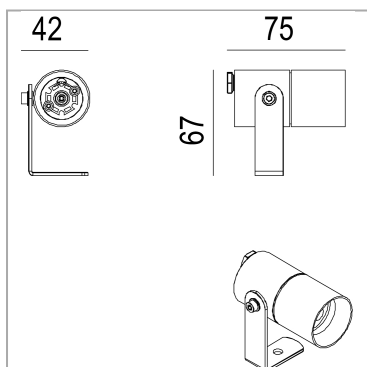

WEB PAGE



MANDATORY ACCESSORIES

AE700.14IP (Copia)



code AE700.12IP

Electronic power supply current

OPTIONAL ACCESSORIES

Oblique cut cover Ø36



code BU027/02


Cover accessory for Bucolica 36, diam. 40, oblique cut.

Technical Sheet



Short picket

Picket H167 mm, diam.40 mm, support attachment for ground fixing.



code BU034

Picket H167 mm, diam.40 mm, support attachment for ground fixing.

Technical Sheet



