
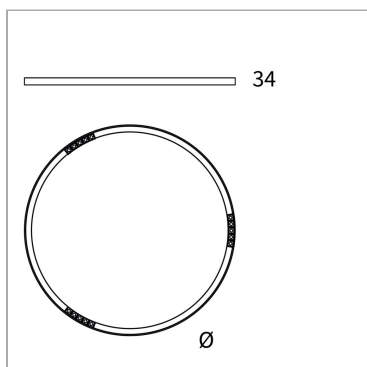


## File Flex Circle "O" outdoor Spot suspension

code FXG51.930S/01

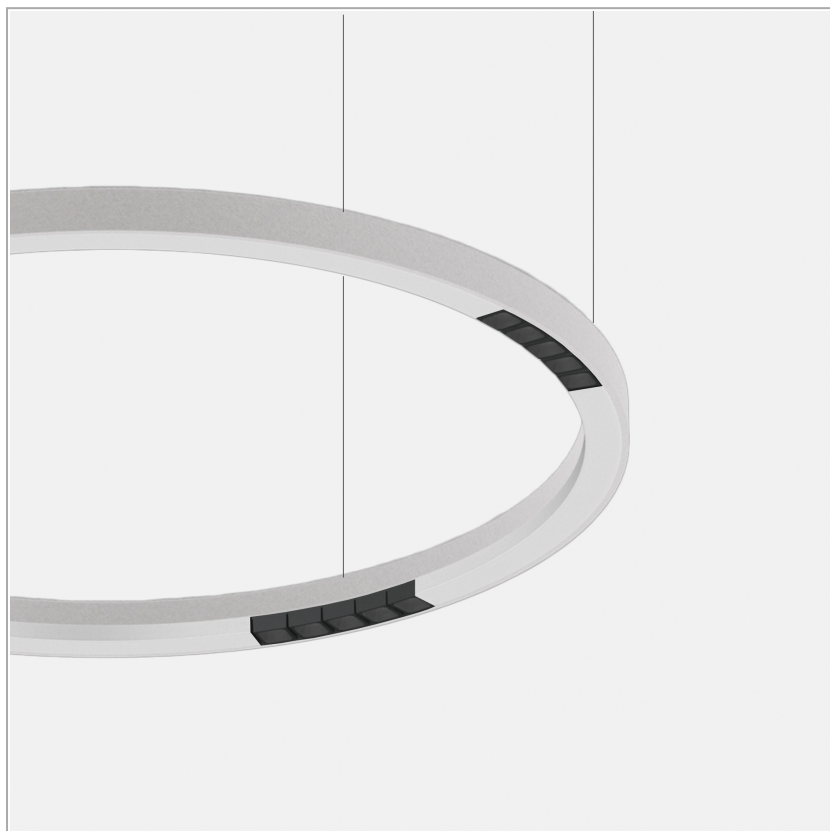

### PRODUCT DESCRIPTION

Circular outdoor ceiling light made of extruded aluminium 6060, direct light emission, complete with 15 LEDs 33 W, colour rendering index CRI>90. Transparent round cross-section power cable; steel suspension cables with millimetric adjuster; Epoxy powder coating; Micro textured white colour finish.

### PRODUCT SPECS

|                              |                     |
|------------------------------|---------------------|
| Installation method          | Suspension          |
| Light source                 | LED                 |
| Absorbed power               | 15x2,2 W            |
| Color temperature            | 3000K               |
| Color rendering index CRI    | >90                 |
| Optic                        | Spot 20°            |
| Finishing                    | White               |
| Luminous flux of the product | 3255 lm             |
| Luminous efficiency          | 99 lm/W             |
| MacAdam color tolerance      | 3                   |
| Life time estimate           | 60.000H L80 B10     |
| Energy efficiency class      | D                   |
| Weight                       | 2.4 Kg              |
| Dimension                    | Ø500 mm             |
| IP Grade                     | IP65 / Ip66         |
| Protection Class             | Class III appliance |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1